

**CHEMICAL PROCESS OPTIMIZATION
AND POLLUTION PREVENTION VIA MASS
AND PROPERTY INTEGRATION**

A Thesis

by

ANA CAROLINA HORTUA

Submitted to the Office of Graduate Studies of
Texas A&M University
in partial fulfillment of the requirements for the degree of
MASTER OF SCIENCE

May 2007

Major Subject: Chemical Engineering

**CHEMICAL PROCESS OPTIMIZATION
AND POLLUTION PREVENTION VIA MASS
AND PROPERTY INTEGRATION**

A Thesis

by

ANA CAROLINA HORTUA

Submitted to the Office of Graduate Studies of
Texas A&M University
in partial fulfillment of the requirements for the degree of

MASTER OF SCIENCE

Approved by:

Chair of Committee,
Committee Members,

Head of Department,

Mahmoud M. El-Halwagi

Mahboobul Mannan

Sergiy Butenko

N.K. Anand

May 2007

Major Subject: Chemical Engineering

ABSTRACT

Chemical Process Optimization and Pollution Prevention via Mass and Property
Integration. (May 2007)

Ana Carolina Hortua, B.S., Universidad de America, Bogota, Colombia

Chair of Advisory Committee: Dr. Mahmoud El-Halwagi

The process industries such as petrochemicals, chemicals and pharmaceuticals, among others, consume large amounts of material and energy resources. These industries are also characterized by generating enormous amounts of waste that significantly contribute to the pollution of the environment. Integrated process design is a very effective technique in conserving process resources and preventing pollution. The design and environmental constraints may involve a variety of component- and property-based restrictions. To date, most techniques have been developed to handle process constraints which is either composition-based (via mass integration) or property-based. No work has been reported to handle the synthesis of resource conservation network that is governed by both constraints.

The objective of this work is to develop a systematic and cost-effective design technique that is aimed at minimizing the consumption of fresh resources and the discharge of pollutants simultaneously. Because of the nature of the component- and property-based constraints, this approach is based on mass and property integration and takes into account the process constraints and also environmental regulations.

In this research work, a new approach has been developed to simultaneously address component-based recycle constraints as well as property-based discharge constraints. The proposed optimization technique is intended to minimize the consumption of fresh resources, the pollutant content in the waste streams, and the operational and waste treatment costs. Additionally, a mixed-integer nonlinear programming (MINLP) formulation is solved for a case study of phenol production from cumene hydroperoxyde to illustrate the new problem and devised solution algorithm.

DEDICATION

This thesis is dedicated to Roberto Rodriguez, without his love, support and guidance I would not have ended up where I am today. I thank him for giving me the strength and confidence that I needed when times turned out very difficult and my spirit was feeling too weak to continue. I am very fortunate to have him by my side.

ACKNOWLEDGMENTS

First and Foremost, I would like to thank God for enabling me to achieve all that I have achieved and for sending me his blessings in every day of my life.

I would like to express my sincere gratitude to my advisor, Dr. Mahmoud El-Halwagi, for his kind help, guidance, support and encouragement throughout my graduate studies at Texas A&M University. Without him this research work would not have been possible.

I would like to thank Dr. Butenko and Dr. Mannan for being members of my thesis committee and for their valuable support, input and time.

I would like to thank my officemates Grace Nworie, Arwa Rabbie and Eva Lovelady for their help, support and advice. My special appreciation goes to Denny K.S. Ng. for his kindly cooperation and assistance during the development of my research.

Last, but not least, I thank my parents and my sister for their love, support and prayers through all these years.

NOMENCLATURE

$C_{r,\text{fresh}}$	cost of fresh resource r
$C_{\text{recovery},u}$	cost of recovery component u
C_{waste}	cost of waste treatment
\bar{C}_p	mixture cluster for the property p
$C_{p,i}$	cluster for property p in stream i
$d_{i,j}$	piping cost factor coefficient from source i to sink j
$d_{r,j}$	piping cost factor coefficient from fresh resource r to sink j
$eff_{,u}$	recovery unit efficiency for component u
$f_{r,j}$	flowrate of fresh resource r fed to sink j
F_r	total fresh resource flowrate required after optimization
F_T	total mass flowrate of the mixture (lb/hr)
F_i	flowrate contribution of source i to the mixture
G_j	flowrate entering to sink j
G_j^{\max}	upper bound on flowrate to sink j
G_j^{\min}	lower bound on flowrate to sink j
G_j^{out}	flowrate leaving sink j
I	binary term
L	lower feasible value of $y_{i,u}^{\text{in.rev}}$

M_j^{sink}	load of impurities entering to sink j
M_i^{source}	load of impurities in source i
N_i	number of streams being mixed
N_p	number of properties of importance for the process
\overline{pH}	pH value of the mixture
p_i	property value of source i
p_T	property value of the mixture
$p_{j,p}^{\text{max}}$	maximum value of property p allowable for sink j
$p_{j,p}^{\text{min}}$	minimum value of property p allowable for sink j
$P_{j,p}^{\text{out}}$	value of property p leaving the sink j
$P_{P(\text{Env. Regulation})}$	value of property p established by environmental regulations,
p_T	property value of the mixture
$ThOD_m$	theoretical oxygen demand of organic compound m .
$ThOD_i$	overall theoretical oxygen demand of source i
\overline{ThOD}	theoretical oxygen demand of the mixture
U	upper feasible value of $y_{i,u}^{\text{in.rev}}$
$w_{i,j}$	flow rate fraction of source i that is assigned to sink j
W_i	flowrate of source i , lb/hr
$w_{i,waste}$	flow rate fraction of source i send to waste

$W_{i,waste}^{in.rev}$	waste flowrate of process stream i sent to a recovery unit
x_i	ratio of flowrate of source i to the total flowrate
$y_{i,u}$	composition of component u in stream i
$y_{i,u}^{in.rev}$	concentration of component u in source i
$y_u^{min.}$	minimum concentration of component u worth to recover
\bar{Y}	mortality percentage of the mixture
z_j^{in}	composition of impurities entering to sink j
z_j^{max}	upper bound on admissible impurity composition to sink j
z_j^{min}	lower bound on admissible impurity composition to sink j
β_i	mixing are of stream i on the ternary cluster diagram
$\psi(p_i)$	property-mixing operator for source i
$\psi(p_T)$	property-mixing operator for the mixture
$\psi_p(p_{i,p})$	mixing-operator of property p in stream i
$\psi_p(p_{j,p}^{in})$	mixing-operator of property p entering to sink j
$\psi_p^{max}(p_{p,j})$	maximum value of mixing-operator of property p for sink j
$\psi_p^{min}(p_{p,j})$	minimum value of mixing-operator of property p for sink j
$\psi_p^{in}(p_{p,j})$	inlet value of mixing-operator of property p for sink j

TABLE OF CONTENTS

	Page
ABSTRACT.....	iii
DEDICATION.....	v
ACKNOWLEDGMENTS.....	vi
NOMENCLATURE.....	vii
TABLE OF CONTENTS.....	x
LIST OF FIGURES.....	xii
LIST OF TABLES.....	xiii
 CHAPTER	
I INTRODUCTION.....	1
II LITERATURE REVIEW.....	3
2.1 Mass Integration.....	4
2.2 Material Rerouting Network.....	5
2.3 Property Integration.....	9
2.4 Key Contributions in the Synthesis of Optimal Water Recycle Network.....	12
III PROBLEM STATEMENT.....	16
IV METHODOLOGY.....	19
4.1 Development of Optimal Material Recycle Networks.....	19
4.2 Mathematical Formulation Based on Process Constraints.....	20
4.3 Development of Optimal Recycle Networks based on Mass and Property Integration.....	23
4.4 Mathematical Formulation Based on Process and Property Constraints.....	24

CHAPTER	Page
V CASE STUDY	29
5.1 Case Study	29
5.2 Process Description	30
5.3 Data Extraction.....	31
5.4 Operational Data	34
5.5 Property Data.....	35
5.5.1 pH	35
5.5.2 Toxicity	36
5.5.3 Theoretical Oxygen Demand (ThOD).....	39
5.6 Environmental Regulations	42
5.7 Waste Treatment Technologies	42
5.8 Mass Integration.....	45
5.9 Property Integration.....	47
5.9.1 Phenol Recovery	49
5.9.2 Acetone Recovery	51
5.9.3 Phenol Toxicity Removal.....	52
5.9.4 ThOD Treatment	55
5.9.5 Neutralization Treatment.....	58
VI CONCLUSIONS AND RECOMMENDATIONS.	69
LITERATURE CITED.	71
APPENDIX A: ASPEN SIMULATION RESULTS FOR THE PHENOL CASE STUDY.....	74
APPENDIX B: IMPURITY CONCENTRATION CALCULATIONS FOR PROCESS SOURCES.....	81
APPENDIX C: TOXICITY CALCULATIONS FOR PROCESS SOURCES.....	83
APPENDIX D: LINGO PROGRAM AND OUTPUT FOR PHENOL CASE STUDY (PROCESS CONSTRAINTS).....	84
APPENDIX E: LINGO PROGRAM AND OUTPUT FOR PHENOL CASE STUDY (PROPERTY CONSTRAINTS).....	89
VITA.....	105

LIST OF FIGURES

	Page
Figure 2.1 Sink Composite Diagram.....	6
Figure 2.2 Source Composite Diagram	7
Figure 2.3 Sink and Source Composite Diagrams	8
Figure 2.4 Material-Recycle Pinch Diagram.....	8
Figure 2.5 Intra-Stream Conservation.....	11
Figure 2.6 Lever Arm Addition for Clusters of Two Streams	12
Figure 3.1 Source-Sink Representation.....	17
Figure 4.1 Source-Sink Representation (First Formulation).....	20
Figure 5.1 Simplified Process Flow Diagram for the Production of Acetone and Phenol From Cumene.....	31
Figure 5.2 Cumene Peroxidation and Cleavage Sections Flow Diagram	33
Figure 5.3 Optimized Direct Recycle Network.....	46
Figure 5.4 Waste Treatment Flow Diagram.....	47
Figure 5.5 Phenol Recovery Process.....	49
Figure 5.6 Acetone Recovery Process.....	51
Figure 5.7 Phenol Toxicity Removal	52
Figure 5.8 ThOD Treatment.....	53
Figure 5.9 Neutralization Treatment	58
Figure 5.10 Optimized Mass-Property Direct Recycle Network	65
Figure 5.11 Phenol Process Flowsheet Diagram after Optimization	67

LIST OF TABLES

	Page
Table 2.1 Ranking of Sinks	6
Table 2.2 Summary of Key Contributions in the Synthesis of Optimal Water Recycle Network	13
Table 5.1 Sink Data	34
Table 5.2 Source Data	35
Table 5.3 pH Source Data	36
Table 5.4 Transformation From Percentages to Probits	38
Table 5.5 Toxicity Source Data	39
Table 5.6 ThOD Source Data	41
Table 5.7 Solvent Extraction Treatment Cost	43
Table 5.8 Air Stripping Treatment Cost	44
Table 5.9 Assumed Cost Pipe Coefficients	45
Table 5.10 Waste Stream Data	67
Table 5.11 Recycle Stream Data	68

CHAPTER I

INTRODUCTION

Every day, tons of industrial wastes are disposed into the environment causing an accelerated and irreversible damage to the environmental surroundings and affecting the human health. Therefore, the protection of the environment has become a major priority around the world. In order to control and diminish the amount of pollutants that are discharged into the environment, stringent environmental regulations have been established. The process industries have been seriously affected from by these restrictions since they contribute in considerable ways to the technical, operational, and economic issues of the process. The goals of conserving natural resources and abating industrial pollution provide motivation to find new techniques to help optimize the process performance while reducing waste discharge.

Process engineering has played a major role in devising design modifications that address the goals of resource conservation and pollution abatement. In particular, a branch of process engineering referred to as “process integration” provides a holistic framework for optimizing the design and operation of the process. Through process integration, several optimization techniques have been developed leading to reduction in

This thesis follows the style of *Industrial & Engineering Chemistry Research*.

the usage of material and energy resources and discharge of waste. To date, most of these techniques have been based mostly on process constraints or environmental constraints but not both. As such, it is possible that after process optimization is performed, the quantity of the resulting waste streams may decrease but the treatment cost and environmental impact may go up. Also, pollution prevention studies have been mostly based on tracking concentrations of pollutants. It is beneficial to incorporate properties of process streams and wastes. Therefore, the main objective of this work is to simultaneously address the process constraints as well as the environmental constraints. Component- and property-based constraints are incorporated. A systematic design approach is developed to provide the following benefits:

- Minimization of the total cost of fresh resources and waste treatment while satisfying process and environmental constraints
- Determination of a tradeoff between the cost of fresh resources versus the cost of environmental compliance and pollution prevention
- Development of implementation projects needed to achieve the target at minimum cost

In order to demonstrate the applicability of the developed approach, a case study is solved to address resource conservation and pollution prevention of a phenol process. The environmental regulations including chemical oxygen demand (COD), toxicity, and pH were taken into consideration in addition to process constraints.

CHAPTER II

LITERATURE REVIEW

Process integration is a holistic approach to process design, retrofitting and operation which emphasizes the unity of the process (El-Halwagi, 2006¹, El-Halwagi, 1997²).

This approach is based on three basic concepts:

1. *Look at the big picture:* Before focusing on the details of the solution, it is important to understand the global insights of the system as a whole. This is achieved by considering the process as an integrated system of interconnected processing units, process stream, waste streams and utilities.
2. *Targeting:* Using process-engineering principles; the process performance benchmarks are identifying. This concept is one of the most important tools of process integration since it allows determining how far the process performance can be pushed without specifying how it may be reached.
3. *Detail process design:* The different alternatives that reach the identified targets are generated and analyzed in order to select the one that best suits the process requirements.

Process integration research may be categorized into three branches: Mass Integration, Heat Integration and Property Integration. Mass and Property Integration will be addressed in this chapter since both have a direct application in the development of this

work. On the other hand, Heat Integration will not be discussed since this approach is out of the scope of this research work.

2.1 Mass Integration

It is a holistic and systematic methodology that provides a fundamental understanding of the global flow of mass within the process and employs this understanding in identifying performance targets and optimizing the allocation, separation, and generation of streams and species. (El-Halwagi and Spriggs, 1998³). Several mass integration strategies such as segregation, mixing, recycle/reuse, material substitution, reaction alteration, process modifications among others are being applied to industry processes with the purpose of reaching desired mass targets while minimizing the generation of waste discharge and the consumption of fresh resources. One of mass-integration strategies is the synthesis of pollutant-removing separation networks such as mass-exchange networks (e.g., El-Halwagi and Manousiouthakis, 1989⁴; Hallale and Fraser, 2000⁵; Foo C.Y., 2004⁶), reactive mass-exchange networks (e.g., El-Halwagi and Srinivas, 1992⁷), reverse-osmosis networks (e.g., El-Halwagi, 1992⁸). Another important strategy is material recycle/reuse via stream rerouting. In this present work, this strategy will be frequently used throughout the thesis. It includes segregation, mixing and recycle of streams. The following section summarizes key techniques for material rerouting.

2.2 Material Rerouting Network

This optimization technique is based on the rerouting of process sources (streams carrying targeted species), without the addition of new devices, to process units (units that can use this sources). This optimization strategy, also known as Direct Recycle, is used to identify the targets for minimum usage of fresh resources, maximum stream recycle and minimum waste discharged. In order to achieve this, a graphical technique called *Material Recycle Pinch Analysis* (El-Halwagi, 2003⁹) is used, which involves the following steps:

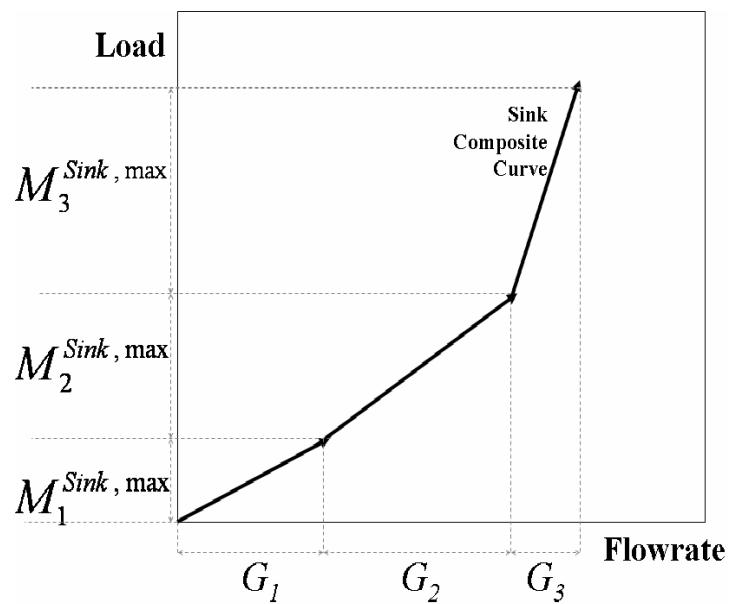
1. *Identify sources and sinks:* Identify the process streams that can be considered as sources for recycle and the process units (sinks) that are able to accept them as replacement for fresh resources.
2. *Identify sink constraints:* Determine the sink operation bounds that restrict the use of recycle streams in each process unit. In this approach just restrictions in flow rate ($G_j^{\min} \leq G_j \leq G_j^{\max}$) and inlet composition of the targeted specie ($z_j^{\min} \leq z_j^{in} \leq z_j^{\max}$) are considered.
3. *Developing sink composite diagram:* After identifying the operational constraints, the sinks should be ranked in ascending order from the one with least admissible inlet composition of the targeted specie to the maximum as shown in Table 2.1.

Table 2.1: Ranking of sinks

Sink	Flowrate	Composition Targeted Specie	Load
1	G_1	z_1^{\min}	M_1^{\min}
2	G_2	z_2	M_2
...
j	G_j	z_j^{\max}	M_3^{\max}

where, the load of the targeted specie entering the each sink is calculated by using the following equation ($M_j^{\text{sink}} = G_j z_j^{\max}$). Finally, the sink composite curve is generated by plotting the load, M_j^{sink} for each sink versus their respective flow rates.

As shown in Figure 2.1.

Figure 2.1: Sink Composite Diagram (El-Halwagi, 2003⁹)

4. *Developing source composite diagram:* This diagram is generated using the same procedure explained for the sink composite curve but using the sources flow rate (W_i) and the load for each source ($M_i^{source} = W_i y_i$). Therefore, it will not be further explained. An example of a source composite diagram is shown in Figure 2.2.

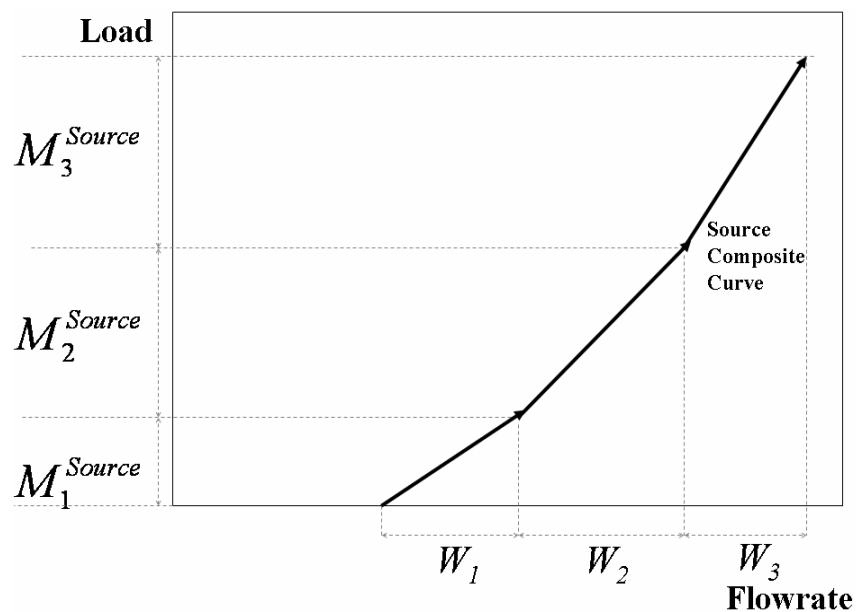


Figure 2.2: Source Composite Diagram (El-Halwagi, 2003⁹)

5. *Developing a material pinch diagram:* After the source and sink composite curves are generated, both plots are placed in the same diagram (Figure 2.3). Afterwards the source composite curve is moved horizontally until it touches the sink composite curve. The point where both curves unite is called the pinch point (Figure 2.4). Figure 2.4 can be divided in three sections. The area below the

pinch point where there are no sources is the target for minimum fresh consumption. The overlapped region between the source and composite curve represents the maximum recycled flowrate. And the horizontal distance above the pinch point which there is no sink represents the minimum waste discharged.

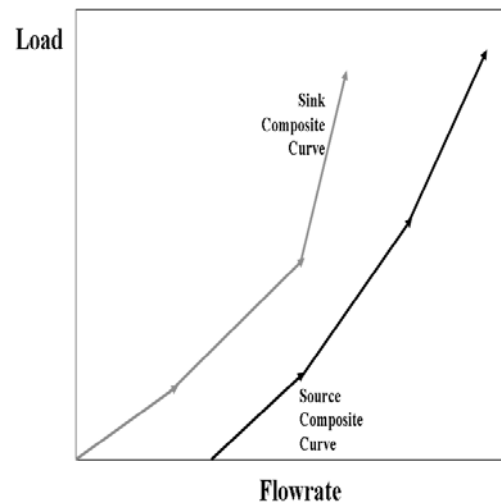


Figure 2.3: Sink and Source Composite Diagrams

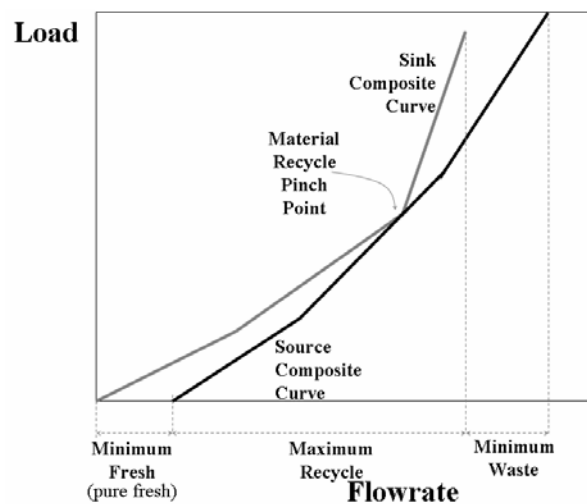


Figure 2.4: Material-Recycle Pinch Diagram (El-Halwagi, 2003⁹)

2.3 Property Integration

The paradigm of *property integration* has been introduced by El-Halwagi and co-workers. Property integration is a functionality-based, holistic approach to the allocation and manipulation of streams and processing units, which is based on the tracking, adjustment, assignment, and matching of functionalities throughout the process (El-Halwagi et al., 2004¹⁰; Shelley and El-Halwagi, 2000¹¹). Similar to *direct recycle* strategy, this holistic approach can be used for identifying the process mass targets such as the minimum use of fresh resources and waste discharge based on tracking properties instead of chemical species. Properties, unlike mass, are not conserved. As a result, concepts such as mixing rules and clusters need to be introduced.

Mixing Rules: In the case where more than one process streams are mixed, the property value of the resultant mixing stream must be evaluated as a function of the flow rate and the property of each stream. As a result, for every property a mixing rule that follows the form of equations 2.1 or 2.2 need to be established.

$$F_T \times \psi(p_T) = \sum_i F_i \times \psi(p_i) \quad (2.1)$$

Where $\psi(p_T)$ is the property-mixing operator, (p_T) is the property of the mixture, and (F_T) is the total flow rate of the mixture. The properties operators can be calculated from first principles or estimated through empirical or semi-empirical methods.

Equation 2.1 can also be rewriting as shown in equation 2.2

$$\psi(p_T) = \sum_{i=1}^{N_{sources}} x_i \psi(p_i) \quad (2.2)$$

where x_i is the fraction contribution of the i^{th} stream into the total flowrate of the mixture.

Clusters: In order to track multiple properties simultaneously, a technique called clustering has been developed by Shelley and El-Halgawi (2000). This technique uses mixing rules to transform properties into dimensionless quantities (clusters), which allow the conserved tracking of properties throughout a process. Property Clusters are defined by two important characteristics: intra- and inter-stream conservation.

- *Intra-Stream Conservation:* Define that the summation of clusters within a stream must be equal to a constant, which is shown in the equation 2.3.

$$\sum_{i=1}^{N_p} C_{p,i} = 1 \quad i = 1, 2, \dots, N_{sources} \quad (2.3)$$

where $C_{p,i}$ is the cluster for property, p in stream i and N_p is the number of properties of importance for the process. The concept intra-stream conservation for three clusters is represented graphically within a ternary diagram in figure 2.5.

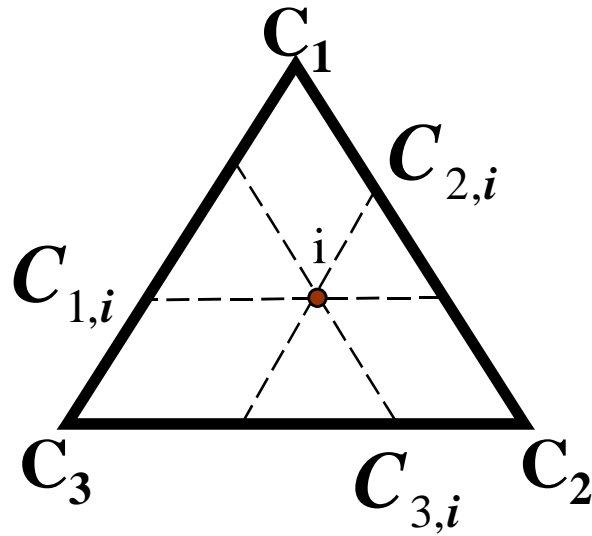


Figure 2.5: Intra-stream conservation (Shelley and El-Halwagi, 2000¹¹)

- *Inter-Stream Conservation:* Define that when two or more streams are mixed, the resulting individual clusters are conserved by using standard additive rules, which follow the principle of lever-arm. This lever-arm additive rule for clusters is stated mathematically in equation (2.4) and it is represented graphically in figure 2.6.

$$\bar{C}_p = \sum_{i=1}^{N_i} \beta_i C_{p,i} \quad (2.4)$$

Where \bar{C}_p is the mixture cluster, for the p property, β_i is the fractional lever arm of cluster $C_{p,i}$, of stream i and N_i is the number of streams being mixed.

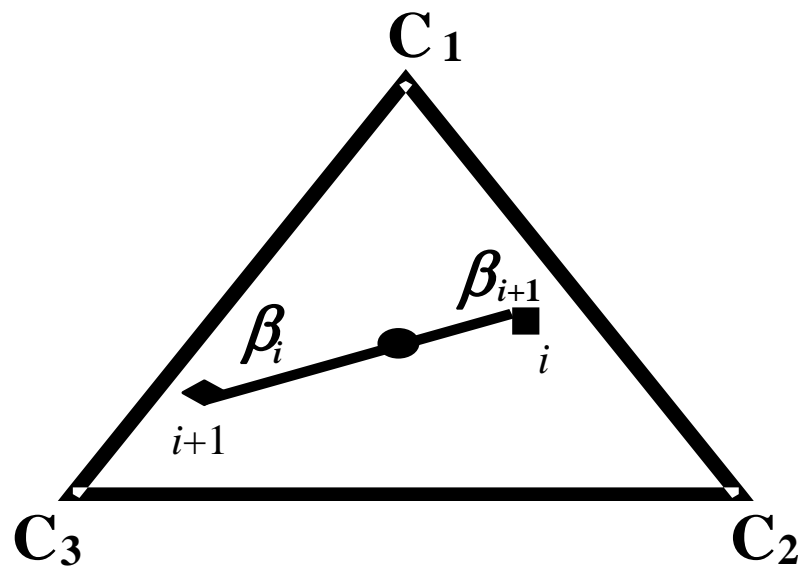


Figure 2.6: Lever arm addition for clusters of two streams (Shelley and El-Halwagi, 2000¹¹)

The optimization of properties using the clustering technique is used when the sinks and/or process sources constraints depends on properties instead of chemical components. This technique is used as a tool to determine the mass targets for the process and to develop recycling and allocation strategies.

2.4 Key Contributions in the Synthesis of Optimal Water Recycle Network

Table 2.2 summarizes key contributions in the area of synthesizing optimal recycle networks.

Table 2.2: Summary of Key Contributions in the Synthesis of Optimal Water Recycle Network

Category Description	Approach	Objective	Constraints	References
Wastewater minimization with mass-exchange units	Water pinch graphical analysis	Flowrate of wastewater	Units modeled as mass exchangers with constraints on transferred load and maximum inlet composition of impurities	Wang and Smith (1994) ¹²
Water minimization with sources and sinks	Water pinch graphical analysis	Flowrate of fresh water and wastewater	Maximum allowable composition of impurities allowed in each sink	Dhole (1996) ¹³
Water minimization with sources and sinks	Source-sink mapping diagram	Flowrate of fresh water and wastewater	Minimum and maximum allowable composition of impurities and flowrates allowed in each sink	El-Halwagi and Spriggs (1996) ¹⁴
Wastewater minimization with mass-exchange units	Algebraic Evolutionary Table	Flowrate of fresh water and wastewater	Units modeled as mass exchangers with constraints on transferred load and maximum inlet composition of impurities	Sorin and Beddard (1999) ¹⁵
Water minimization with sources and sinks	Optimality conditions for recycle	Flowrate of fresh water and wastewater	Maximum allowable composition of impurities allowed in each sink	Polley and Polley (2000) ¹⁶

Table 2.2: Continued

Category Description	Approach	Objective	Constraints	References
Water minimization with global pinch	Water surplus diagram	Flowrate of fresh water and wastewater	Maximum allowable composition of impurities allowed in each sink	Hallale (2002) ¹⁷
Water and Wastewater Minimization	Material recovery pinch diagram	Minimum fresh water, maximum recycle, and minimum wastewater	Single- and multi-component constraints on maximum allowable compositions for each sink	El-Halwagi (2003) ⁹
Water and Wastewater Minimization	Mathematical programming techniques	Minimum fresh water or minimum cost	Single- and multi-component constraints on maximum allowable compositions for each sink	Alva-Argaez (1999) ¹⁸ , Benko and Rev.(2000) ¹⁹ Dunn and Wenzel(2001) ²⁰ Saveiski and Bagajewicz.(2000, 2001) ^{21,22}
Water network with interception	Mathematical programming	Minimum fresh and interception costs	Single- and multi-component constraints on maximum allowable compositions for each sink	Gabriel and El-Halwagi (2005) ²³
Property-based wastewater minimization	Clustering graphical technique	Minimum fresh water and wastewater	Minimum and maximum allowable properties for each sink (up to three properties)	Shelley and El-Halwagi (1999) ²⁴ , El-Halwagi (2003) ⁹

Table 2.2: Continued

Category Description	Approach	Objective	Constraints	References
Property-based wastewater minimization	Property-based algebraic technique	Minimum fresh water and wastewater	Minimum and maximum allowable properties for each sink (any number of properties)	Qin et al. (2004) ²⁵
Property-based wastewater minimization	Property-based material recovery pinch diagram	Minimum fresh water and wastewater	Minimum and maximum allowable properties for each sink	Kazantzi and El-Halwagi (2005) ²⁶
Property-based wastewater minimization	Surplus diagram cascade algebraic technique	Minimum fresh water and wastewater	Minimum and maximum allowable properties for each sink	Foo C.Y. (2006) ²⁷

The foregoing discussion illustrates the lack of a technique that can address all of the following aspects simultaneously:

- Composition- and property-based constraints
- Constraints on process units as well as the environment
- Waste-treatment units that adjust both compositions and properties
- Cost of fresh, recycle, and waste treatment

This work is intended to overcome this literature gap by introducing a systematic approach to tackle these limitations.

CHAPTER III

PROBLEM STATEMENT

The problem addressed in this work deals with the allocation of streams for direct reuse/recycle and waste treatment simultaneously. It has the following characteristics:

- Constraints are considered for the process units (sinks) as well as the environment.
- Composition- and property-based constraints are considered for recycle and for waste discharge
- Waste treatment units are used to adjust compositions and properties
- Cost of fresh usage, recycle, and waste treatment are all included

The problem can be formally stated as follows:

Given a process with a set of sources or streams: $SOURCES = \{i | i=1, N_{Sources}\}$. Each source, i , has a flowrate W_i , and a composition $y_{i,u}$ (where u is index for components).

The stream i is characterized by a set of properties: $PROP_i = \{p_{i,p} | p=1, N_{properties}\}$. Given also is a set of sinks or process units: $SINKS = \{j | j=1, N_{Sinks}\}$. Each sink has constraints on the compositions and properties of its feed, i.e.,

$$z_{j,u}^{\min} \leq \text{composition of component } u \text{ in feed to sink } j \leq z_{j,u}^{\max} \quad j=1,2,\dots,N_{Sinks} \quad \text{and} \\ u=1,2,\dots,N_{components} \quad (3.1)$$

$$p_{j,p}^{\min} \leq \text{property } p \text{ of feed to sink } j \leq p_{j,p}^{\max} \quad j=1,2, \dots, N_{Sinks} \quad \text{and } p=1,2,\dots,N_{properties} \\ (3.2)$$

External fresh resources, with different impurity content, are available F_r : FRESH = $\{r|r=1,\dots,N_{\text{Fresh}}\}$ to supplement the use of process sources in sinks. The cost of the fresh is referred as $C_{r,\text{fresh}}$ (\$/lb of the fresh). In addition, source streams that did not reused/recycled are sent to waste treatment in order to comply with environmental regulations before discharged to the environment. The cost of waste treatment includes fix and operational cost. It is represented as C_{waste} (\$/ pollutant or property removed). The main objective of this work is to develop a systematic procedure that optimizes the cost of the fresh resource, piping cost for reconstructed the material reuse/recycle network and waste treatment cost. A schematic representation of the stated problem is shown in Figure 3.1.

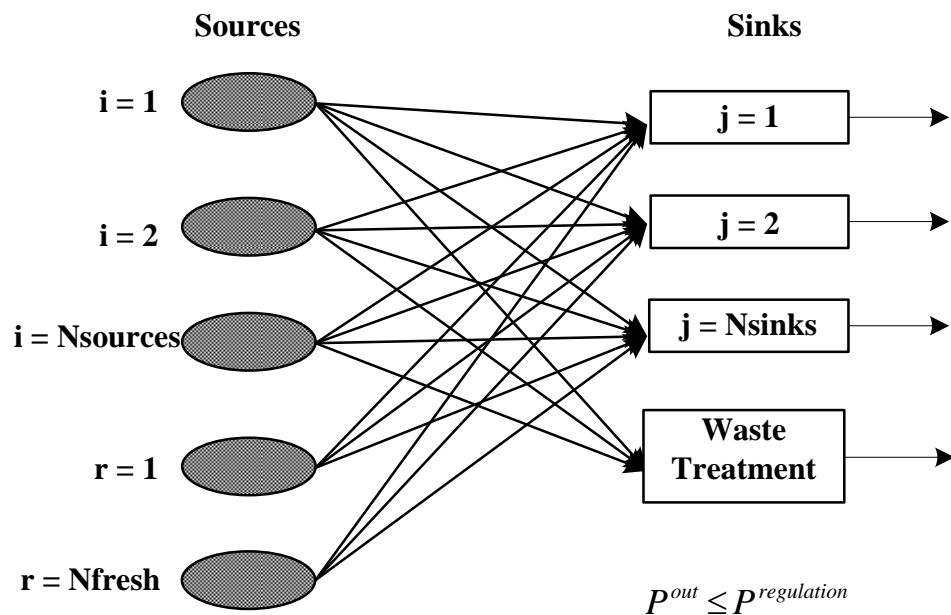


Figure 3.1: Source-sink representation

The design procedure should achieve the following:

- Determine the optimum allocation of process source to each sink that minimize the consumption of fresh resource.
- Minimize the pollutant concentration in waste streams to reduce the cost of waste treatment
- Determine the minimum total annualize cost for reconstructed the material reuse/recycle network that comply with environment regulations.

CHAPTER IV

METHODOLOGY

In order to develop an optimization technique that accomplishes all the design challenges mentioned in the problem statement, two mathematical algorithms are formulated. The first optimization program takes into consideration only process constraints while the second formulation includes environmental constraints for waste discharge. The mathematical algorithms are based on mass and property integration methodologies.

4.1 Development of Optimal Material Recycle Networks

A generalized mathematical program is formulated to design Optimal Material Recycle Networks. This formulation is based on direct material recovery pinch analysis technique and has the objectives of determining the targets for minimum consumption of fresh resources, minimum waste discharge, direct-recycle configurations and the minimum operational cost assuming that the waste produce by the process can be discharged to the environment without any restriction. To facilitate the development of the mathematical program, a graphically representation of the optimization problem is sketched. Figure 4.1 shows a source-sink representation of the problem to be solved when just process constraints are taking in consideration.

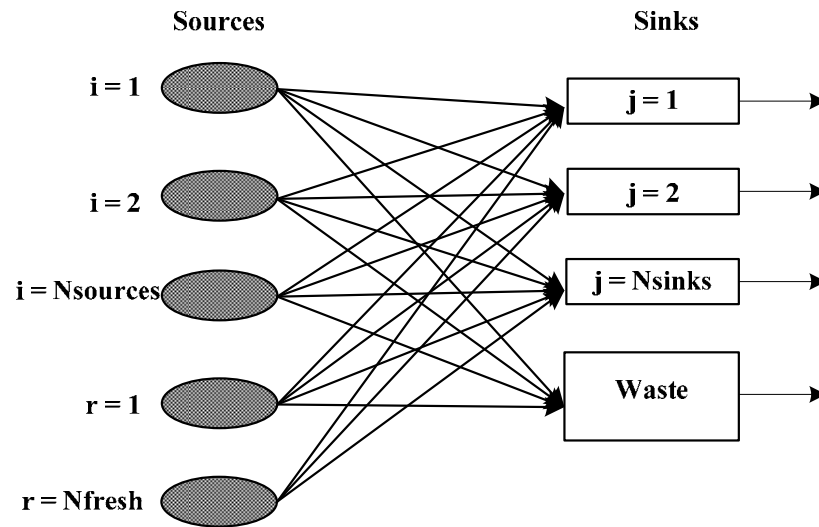


Figure 4.1: Source-sink representation (First formulation)

As seen in figure 4.1, the sources are split into unknown fractions and allocated to the different sinks. In addition, an extra sink is placed in order to account for the unrecycle material and fresh resources are always available to be split and allocated in any sink, except for the waste sink.

4.2 Mathematical Formulation Based on Process Constraints

The mathematical formulation used to represent this problem is illustrated in the following equations. The objective function of this program is to minimize the operational cost, which includes the cost for consumption of fresh resources and the cost of piping for building the recycle network after optimization. The objective function is shown in Equation 4.1.

$$\text{Minimize} \left(\sum_{r=1}^{N_{\text{fresh}}} C_{r,\text{Fresh}} \times f_{r,j} + \text{Piping_Cost} \right) \quad (4.1)$$

where $C_{r,\text{Fresh}}$ is the cost of fresh resource r , and $F_{r,j}$ is the amount of fresh resource r fed to the j^{th} sink. The total piping cost is proportional to the flowrate going through the pipe and a factor coefficient. This is shown in Equation 4.2.

$$\text{Piping_Cost} = \sum_{i=1}^{N_{\text{source}}} (w_{i,j} \times d_{i,j}) + \sum_{r=1}^{N_{\text{fresh}}} (f_{r,j} \times d_{r,j}) \quad (4.2)$$

where $d_{i,j}$ and $d_{r,j}$ are cost factor coefficients, which are function of material of construction, diameter of the pipe and manhattan distance for source i or fresh r to sink j . $f_{r,j}$ is flow rate fraction of fresh r allocated in sink j and $w_{i,j}$ is the flow rate fraction of source i that is assigned to sink j

The objective function is subjected to the following constraints:

Splitting constraint for sources:

$$W_i = \sum_{j=1}^{N_{\text{sin ks}}} w_{i,j} + w_{i,\text{waste}} \quad (4.3)$$

where $w_{i,\text{waste}}$ represents the flow rate fraction that can not be recycle; and therefore, it is taken as waste.

Splitting constraint for fresh resources:

$$F_r = \sum_{i=1}^{N_{\text{Sinks}}} f_{r,j} \quad (4.4)$$

Waste constraint:

$$Waste = \sum_{i=1}^{N_{sources}} w_{i,waste} \quad (4.5)$$

In order to satisfy sink constraints, split fractions that come from process sources and the fresh streams might be required to mix before entering to a process unit. Mass and component balances at the mixing point are needed to determine possible mixing alternatives and the allocation of the resultant mixing streams to sinks.

Mass Balance:

$$G_j = \sum_{i=1}^{N_{sources}} w_{i,j} + \sum_{i=1}^{N_{fresh}} f_{r,j} \quad \forall j \quad (4.6)$$

where G_j is the flowrate entering to sink j .

Component balance:

$$G_j z_{j,u}^{in} = \sum_{i=1}^{N_{sources}} w_{i,j} y_{i,u} \quad \forall j, u \quad (4.7)$$

where $z_{j,u}^{in}$ is the feed composition of component u to sink j . This value must lie between the lower and upper composition constraints for component u on sink j . And $y_{i,u}$ is the composition of component u in process source i .

All the variables in this formulation require nonnegative constraints illustrated in equation 4.8 through 4.10

$$f_{r,j} \geq 0 \quad \{r|r=1, N_{\text{Fresh}}\}, \{j|j=1, N_{\text{Sinks}}\} \quad (4.8)$$

$$w_{i,j} \geq 0 \quad \{i|i=1, N_{\text{Sources}}\}, \{j|j=1, N_{\text{Sinks}}\} \quad (4.9)$$

$$z_{j,u}^{\text{in}} \geq 0 \quad \{j|j=1, N_{\text{Sinks}}\}, u = \text{index for component} \quad (4.10)$$

Using this formulation, the mass targets for the process are identified, the minimum operational cost is determined and different direct-recycle configurations are generated.

4.3 Development of Optimal Recycle Networks Based on Mass and Property

Integration

Process waste must comply with environmental regulations before it can be discharged to the environment; therefore, waste streams must be sent to treatment units where the pollutants are removed up to an acceptable value for discharging. As a result, waste treatment has become an important expenditure increasing significantly the overall operational cost. The main objective of this approach is to minimize the fresh resource consumption and the waste treatment cost simultaneously. In order to solve this problem a mathematical program is developed which takes into consideration process and property constraints. Environmental regulations involve limits on properties such as pH, toxicity, color, ThOD etc. Therefore, property integration methodology is needed to

track the property values within the process. The source sink representation for this problem is shown in figure 3.1 (Chapter III).

4.4 Mathematical Formulation Based on Process and Property Constraints

The mathematical formulation is illustrated in the following equations. The objective function of this program is to minimize the operational cost, which includes the cost for consumption of fresh resources, piping, recovery and waste treatment. Waste streams are sent to recovery units before going through waste treatment with the aim of recovering components that have commercial value or that can be reused within the process.

The objective function is shown in Equation 4.11.

$$\text{Minimize} \left(C_{Fresh} \times F_r + Piping_Cost + Recovery_Cost + \sum_{j=1}^{N_{Sinks}} Waste_Cost_j (G_j, G_j^{out}, P_{j,p}^{out}, P_{P(Env.Regulation)}, \forall p) \right) \quad (4.11)$$

The waste treatment cost is a function of the property value, p^{th} leaving the sink j , $P_{j,p}^{out}$, the property value, p^{th} established by environmental regulations, $P_{P(Env.Regulation)}$ and the flowrates entering and leaving the sink j , G_j and G_j^{out} . $\forall p$ stands for all values of p .

$Recovery_Cost$ is the cost associated with the technology used to recover component u and it is shown in equation 4.12

$$Recovery_Cost = \sum_{u=1}^{N_{Component}} \left(C_{recovery,u} \left(\sum_{i=1}^{N_{Source}} \sum_{u=1}^{N_{Component}} (w_{i,waste}^{in.rev}, y_{i,u}^{in.rev}, eff_u) \right) \right) I \quad (4.12)$$

where $C_{recovery,u}$ is the cost of recovery for component u , $w_{i,waste}^{in.rev}$ are the waste flowrate of process stream i , which is sent to a recovery unit, $y_{i,u}^{in.rev}$ is the concentration of component, u in waste stream i and the efficiency of the recovery unit for component, u is expressed in term eff_u . I is a binary term that takes the value of 1 if component u is recovered or 0 (zero) if is not.

The value assign to the binary term I_u is determined using the constraint shown in Equation 4.13.

$$(L - y_{i,u}^{min.}) * (1 - I) \leq y_{i,u}^{in.rev} - y_u^{min.} \leq (U - y_{i,u}^{min.}) * (I) \quad (4.13)$$

where $y_u^{min.}$ is the minimum concentration of component u that is worth to recover and L and U are the lower and upper bounds on the feasible values of $y_{i,u}^{in.rev}$. In order to satisfy the linear constraint I is forced to be 0 when $y_{i,u}^{in.rev} \leq y_u^{min.}$, otherwise if it is 1, the value of $(L - y_{i,u}^{min.}) * (1 - I)$ becomes zero which violates the constraint

$$(L - y_{i,u}^{min.}) * (1 - I) \leq y_{i,u}^{in.rev} - y_u^{min.}. \text{ On the other hand, when } y_{i,u}^{in.rev} \geq y_u^{min.}, \text{ the term}$$

$y_{i,u}^{in.rev} - y_u^{min.}$ is positive and I is forced to be 1, otherwise, if I is zero then the term

$$(U - y_{i,u}^{min.}) * (I) \text{ becomes zero which is a violation of the statement that}$$

$$y_{i,u}^{in.rev} - y_u^{min.} \leq (U - y_{i,u}^{min.}) * (I).$$

The objective function is subject to the following constraints:

Splitting constraint for sources:

$$W_i = \sum_{j=1}^{N_{sinks}} w_{i,j} + w_{i,waste} \quad (4.14)$$

Splitting constraint for fresh resources:

$$F_r = \sum_{i=1}^{N_{sinks}} f_{r,j} \quad (4.15)$$

Waste constraint:

$$Waste = \sum_{i=1}^{N_{sources}} w_{i,waste} \quad (4.16)$$

Mass Balance at the mixing point:

$$G_j = \sum_{i=1}^{N_{sources}} w_{i,j} + \sum_{i=1}^{N_{fresh}} f_{r,j} \quad (4.17)$$

Component balance at the mixing point:

$$G_j z_{j,u}^{in} = \sum_{i=1}^{N_{sources}} w_{i,j} y_{i,u} \quad \forall j, u \quad (4.18)$$

Property balance at the mixing point:

$$G_j \psi_p(p_{j,p}^{in}) = \sum_{i=1}^{N_{sources}} w_{i,j} \psi_p(p_{i,p}) \quad \forall j, p \quad (4.19)$$

where $\psi_p(p_{j,p}^{in})$ is the operator of property p going to sink j and $\psi_p(p_{i,p})$ is the operator of property p in stream i .

It is important to mention that this formulation applies to the class of properties that have mixing rules that follow the form of equation (4.20).

$$\psi(p_T) = \sum_{i=1}^{N_{sources}} x_i \psi(p_i) \quad (4.20)$$

where $\psi(p_T)$ is the property-mixing operator, (p_T) is the property of the mixture, and x_i is the fractional contribution of stream i .

Process sinks have constraints in compositions and properties, which are shown in Equations 4.21 and 4.22

$$z_{j,u}^{\min} \leq z_{j,u}^{in} \leq z_{j,u}^{\max} \quad (4.21)$$

where $z_{j,u}^{\min}$ and $z_{j,u}^{\max}$ are the minimum and maximum composition of component u that can be feed to sink j .

$$\psi_p^{\min}(p_{p,j}) \leq \psi_p^{in}(p_{p,j}) \leq \psi_p^{\max}(p_{p,j}) \quad (4.22)$$

where $\psi_p^{\min}(p_{p,j})$ and $\psi_p^{\max}(p_{p,j})$ are the minimum and maximum constraints on the operators of property p going to sink j . The property sink constraints given in equation 3.2 can be rewritten in terms of mixing operators as shown in equation 4.22.

Nonnegative constraints:

$$f_{r,j} \geq 0 \quad \{r|r=1, N_{\text{Fresh}}\}, \{j|j=1, N_{\text{Sinks}}\} \quad (4.23)$$

$$w_{i,j} \geq 0 \quad \{i|i=1, N_{\text{Sources}}\}, \{j|j=1, N_{\text{Sinks}}\} \quad (4.24)$$

$$z_{j,u}^{\text{in}} \geq 0 \quad \{j|j=1, N_{\text{Sinks}}\}, u = \text{index for component} \quad (4.25)$$

$$\psi_p(p_{j,p}^{\text{in}}) \geq 0 \quad \{j|j=1, N_{\text{Sinks}}\}, p = \text{index for properties} \quad (4.26)$$

$$\psi_p(p_{i,p}) \geq 0 \quad \{i|i=1, N_{\text{Sources}}\}, p = \text{index for properties} \quad (4.27)$$

This formulation will generate a solution that determines minimum use of fresh resource, minimum waste discharged, minimum waste treatment cost and will generate different recycle configurations that achieve the identified targets.

CHAPTER V

CASE STUDY

To demonstrate the applicability of the proposed approach, a case study is addressed in this chapter. A description of the case study is firstly presented. Then, the relevant data is gathered and summarized. Next, the developed methodology is applied in the case study and the results are then further analyzed.

5.1 Case Study

Production of phenol from cumene hydroperoxide is selected as the case study in this work. Due to the phenol is considered to be an extremely hazardous and toxic substance that even in small quantities can cause severe damage in human health and/or significantly contributes to the pollution of the environment. Therefore, this process is very concerned by the public and industries. Besides, the strict environment regulations towards discharge of phenol have caused a lot of problems and high treatment cost for the industries. Thus, this process is chosen as the case study to illustrate the proposed methodology. Although, the waste generated from the phenol production process is restricted by several properties such as color, temperature, odor etc., in this study the chemical oxygen demand (COD), toxicity and pH are the parameters taken into consideration. This is because the selected properties are strongly environmentally regulated. The objective of this case study is to design an optimal network that not only reduces the consumption of fresh resources but also comply with the environmental

regulations. Besides, the recovery cost, treatment cost and piping cost are also taken into consideration during the optimization.

5.2 Process Description

Figure 5.1 showed the schematic representation of the process flowsheet for the production of phenol from cumene hydroperoxide (CHP). In this process, the cumene is selected as the raw material. Firstly, the raw material (i.e. cumene) is fed in to the reactor along with air, and Na_2CO_3 which work as a buffer solution. In the reactor, the cumene is oxidized into cumene hydroperoxide (CHP) with atmospheric oxygen which is found in the air. The mixture of CHP and cumene is then sent to a wash operation to remove the excess of the buffer solution and water soluble materials. Next, the stream leaving the washer is sent to a Concentration Unit in order to increase the low concentration of CHP to 80% by weight or higher. After that, the concentrated cumene hydroperoxide stream is fed to the cleavage units where the CHP is decomposed to form phenol and acetone with the presence of sulfuric acid. The resulting cleavage stream is neutralized with a small amount of sodium hydroxide and then it is separated into two phases (i.e. organic and water phase). The water phase is sent to wastewater treatment. Meanwhile, the organic phase, which is mainly a mixture of phenol, acetone and cumene, is treated in a water wash to remove the excess of alkali and finally sent to a section of distillation columns where it is fractionated into the pure products phenol and acetone.

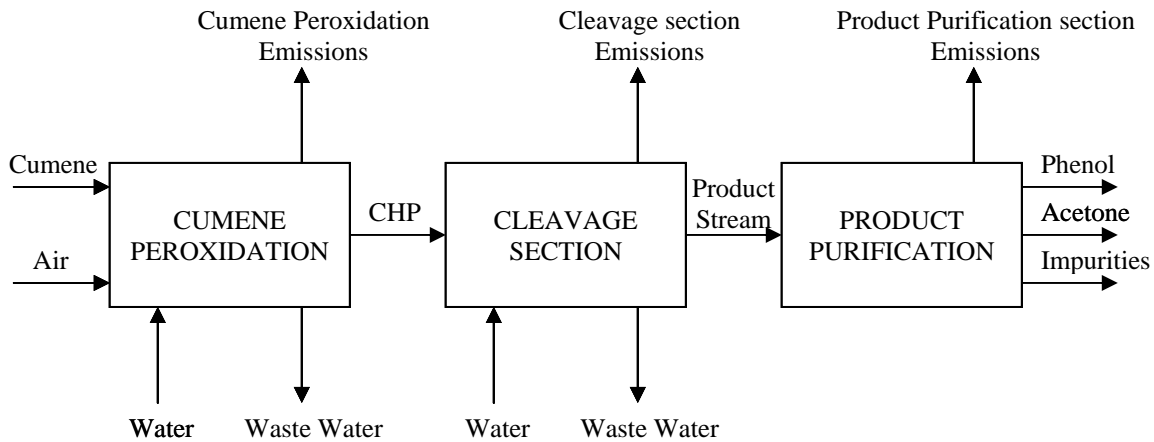


Figure 5.1: Simplified process flow diagram for the manufacture of acetone and phenol from cumene

5.3 Data Extraction

In this case study, the water is targeted as the fresh resource for process integration.

Therefore, the operational data, properties values and operational costs of the process units that consume and discharge water directly are analyzed. Figure 5.2 shows a detailed process flow sheet of the cumene peroxidation and cleavage sections.

According to the process description and Figure 5.2, the process units, process streams and fresh resources of interest for this case study are summarized as follows:

- Process sinks:
 1. Waterwash cumene peroxidation section (Wash101)
 2. Neutralizer (R104)
 3. Waterwash cleavage section (Wash102)

- Process sources:
 1. Stream 8 from Wash101
 2. Stream 22 from Decanter (D101)
 3. Stream 25 from Wash102

- Fresh water sources:
 1. Freshwater1: 0 impurity concentration
 2. Freshwater2 : 0.012 impurity concentration (mass fraction)

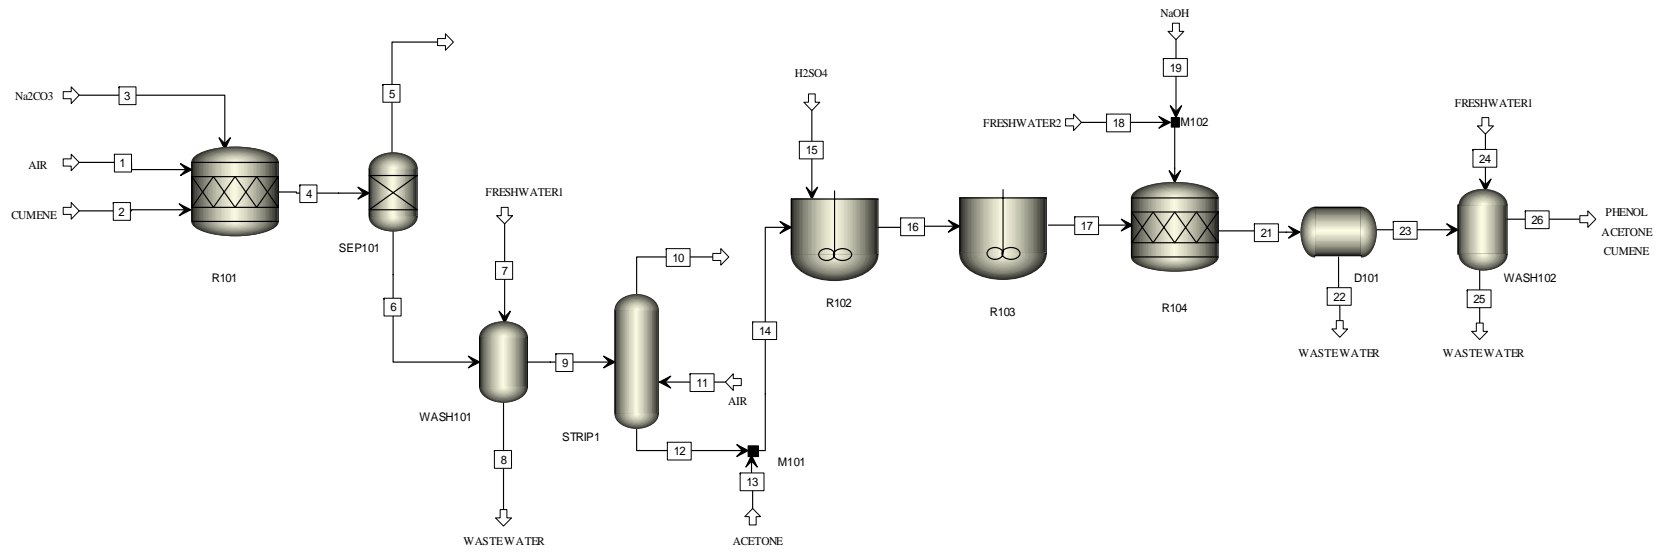


Figure 5.2: Cumene peroxidation and cleavage sections flow diagram

5.4 Operational Data

In order to obtain the operational data needed to apply the proposed optimization technique, the peroxidation and cleavage sections of the phenol plant are modeled using a computer-aided simulation program called Aspen Plus. The results obtained from the simulator are summarized in Table 5.1 and Table 5.2. For detail Aspen simulation results are shown in appendix A.

Table 5.1: Sink Data

Sinks	Water Flowrate G_j (lb/hr)	Max. Inlet Impurity Concentration z_j^{\max} (Mass Fraction)
Wash101	6000	0.013
Wash102	4400	0.013
Neutralizer R104	2490	0.1

Due to there is not enough information to determine the maximum allowable impurity concentration accepted by each process sink, the values of z_j^{\max} for each process sink were assumed by allowing a deviation from the actual impurity content on the feed stream which enter to each sink.

Table 5.2 Source Data

Source	Flowrate G_j (lb/hr)	Impurity Concentration y_i (Mass Fraction)
Washer101	8083	0.016
Decanter101	3900	0.024
Washer102	3279	0.22

The impurity concentration of each stream source was calculated following the procedure which is showed in Appendix B.

5.5 Property Data

Besides of the operational data, property values for pH, toxicity and ThOD (Theoretical Oxygen demand) for each process source are needed for the optimization process. The procedure used to determine each property is described as follows:

5.5.1 pH

The pH value, for each process source, was calculated using as a tool the simulation program Aspen Plus. The pH data are obtained from the results of the simulator and are shown in the Table 5.3.

Table 5.3: pH Source Data

Source	pH
Wash101	6.68
Decanter101	6.46
Wash102	5.69

5.5.2 Toxicity

Prior to describe the procedure to calculate the toxicity data, it is important to define the following terms:

Toxicity

It is a property that describes the effect of hazardous chemicals on biological organisms.

Acute Toxicity

It is the adverse effects observed, on the tested organism, during a short period of time, which is usually less than 96 hours.

Dose Response Curve

It is a graphical representation between the degree of response on a biological organism and the amount of toxicant administered. The dose response curve is usually plotted versus the logarithm of the dose in order to provide a much straight line in the middle of

the curve. If the response of interest is death or lethality, the response curve is called the lethal dose curve.

LD₅₀ (Lethal Dose 50%)

It represents the dose at which 50% of the organisms exposed to a toxic will die.

Probit Function (Y)

It is a mathematical relationship that transforms the sigmoid shape for the normal response-dose curve into a straight line.

The probit variable Y is represented mathematically in equation 5.1

$$Y = k_1 + k_2 \log V \quad (5.1)$$

where k_1 and k_2 are the probit parameters and V is the magnitude of the exposure.

The relationship between the percentages P and the probit variable Y is provided in equation 5.2. The transformations from percentages to probits are also found tabulated as shown in Table 5.4.

$$P = 50 \left[1 + \frac{Y - 5}{|Y - 5|} \operatorname{erf} \left(\frac{|Y - 5|}{\sqrt{2}} \right) \right] \quad (5.2)$$

Table 5.4: Transformation from percentages to probits. (D.J. Finney, Probit Analysis, 1971)

%	0	1	2	...	9
0	-	2.67	2.95	3.66
10	3.72	3.77	3.82	4.12
20	4.16	4.19	4.23	4.45
.
.
.
.
90	6.28	6.34	6.48	7.33

Phenol Toxicity

In this case study, two chemicals, phenol and acetone are mainly discharged to the environment. However, phenol toxicity is only evaluated since acetone is recognized for having low acute and chronic toxicity; and therefore, the release of this chemical do not represent a threat to the environment and/or human health. Phenol toxicity is calculated using the probit correlation shown in equation 5.3

$$Y = -0.22 + 5.27 \log C \quad (5.3)$$

where Y represents the lethal response and C (ppm) is the phenol concentration.

This probit equation was determined by performing several phenol acute toxicity experiments on *Daphnia Magna* as tested organism (Soboslay, 1987²⁸). Using equation 5.3 the Y values (mortality response) for each process source is calculated and then transform to percentage using Table 5.4. Description of this toxicity calculation are shown in Appendix C and the results are summarizes in Table 5.5.


Table 5.5 Toxicity Source Data

Source	Phenol Concentration (ppm)	Toxicity Mortality %
Wash101	17	89.6
Decanter101	13000	100
Wash102	24000	100

5.5.3 Theoretical Oxygen Demand (ThOD)




ThOD is the theoretical amount of oxygen, O_2 required to oxidize an organic compound to its final oxidation products. ThOD in wastewater streams have been strictly regulated since the discharge of high values of ThOD in public effluents would reduce significantly the oxygen available in the water causing adverse effects on fish and aquatic life in general. In this case study, the ThOD required for each process source was calculated using the following procedure:

First, the balance oxidation reaction for each organic compound contained in stream i is written as shown in equation 5.4.



where a , b , c , d are stoichiometry coefficients.

e.g.: Stream 8 contains three organic compounds Cumene Hydroperoxide ($C_9H_{12}O_2$), Dimethylphenylcarbinol ($C_9H_{12}O$), and Phenol (C_6H_5OH). Oxidation reactions for these compounds are shown in equations 5.5 through 5.7



Second, the oxygen require to reach complete oxidation (ThOD) of each organic compound is determined by using stoichiometry relationships as shown in equation 5.8.

$$ThOD_m = \left(\frac{b \text{ mol } O_2}{a \text{ mol } m.} \right) \left(\frac{MW_{O_2}}{\text{mol } O_2} \right) \left(\frac{1 \text{ mol } m.}{MW_m} \right) \{m|m=1, \dots, N_{\text{Organic Compound}}\} \quad (5.8)$$

where MW_{O_2} and MW_m are the molecular weights of oxygen and the organic compound respectively and $ThOD_m$ is the theoretical oxygen demand of the organic compound m .

e.g.: ThOD values for the organic compound in stream 8 are calculated in equations 5.9 through 5.11

$$ThOD_{\text{cumene.}} = \left(\frac{11 \text{ mol } O_2}{\text{mol cumene.}} \right) \left(\frac{32 \text{ lb } O_2}{\text{mol } O_2} \right) \left(\frac{1 \text{ mol cumene.}}{152 \text{ lb cumene.}} \right) = 2.315 \text{ lb } O_2 / \text{lb cumene.} \quad (5.9)$$

$$ThOD_{\text{dim etyl.}} = \left(\frac{11.5 \text{ mol } O_2}{\text{mol dim etyl.}} \right) \left(\frac{32 \text{ lb } O_2}{\text{mol } O_2} \right) \left(\frac{1 \text{ mol cumeneh.}}{136 \text{ lb dim etyl.}} \right) = 2.70 \text{ lb } O_2 / \text{lb dim etyl.} \quad (5.10)$$

$$ThOD_{\text{phenol}} = \left(\frac{7 \text{ mol } O_2}{\text{mol phenol}} \right) \left(\frac{32 \text{ lb } O_2}{\text{mol } O_2} \right) \left(\frac{1 \text{ mol phenol}}{94.11 \text{ lb phenol}} \right) = 2.38 \text{ lb } O_2 / \text{lb phenol} \quad (5.11)$$

Finally, The overall ThOD of the stream i is calculated by using equation (5.12)

$$ThOD_i = \sum_{m=1}^{N_{Org.Compound}} x_m ThOD_m \quad (5.12)$$

where x_m is the fractional contribution (mass/volume) of the organic compound m in stream i .

e.g.: The ThOD for stream 8 is calculated in equation 5.13

$$\begin{aligned} &0.00091 \frac{lb \text{ Cumene}}{ft^3} * \frac{2.70 lb O_2}{lb \text{ Cumene}} + 0.0027 \frac{lb \text{ Dimetyl}}{ft^3} * \frac{2.70 lb O_2}{lb \text{ Dimetyl}} + \\ &+ 0.00094 \frac{lb \text{ Phenol}}{ft^3} * \frac{2.381 lb O_2}{lb \text{ phenol}} = 0.0117 \frac{lb O_2}{ft^3} \end{aligned} \quad (5.13)$$

The compositions of the organic components in stream 8 were determined based on the mass balance results obtained from the simulation. The ThOD results for all process sources are summarized in Table 5.6

Table 5.6 ThOD Source Data

Source	ThOD lbO_2 / ft^3	ThOD gO_2 / l
Wash101	0.0117	0.187
Decanter101	3.05	48.85
Wash102	5.75	92.10

5.6 Environmental Regulations

The discharge of waste streams to the environment is restricted by the following environmental regulations (Nemerow, 1978²⁹):

- ThOD = 75 mg O₂/l
- 5.5 < pH < 9.0
- Maximum Phenol load discharged ≤ 0.054 lb/hr
- Phenol Toxicity = 0% mortality

5.7 Waste Treatment Technologies

In this case study, four water treatment technologies were used to reduce the pollution content in the wastewater streams. The descriptions of these units are given as follows:

Solvent Extraction:

Solvent extraction is one of the most important techniques used in the pretreatment of high-phenol concentrated wastewater streams. This process was used to recover phenol from waste streams that have a phenol content of more than 500 ppm. The recovery of phenol is highly recommended since it reduces the pollutant content in the waste streams and additionally brings economic benefits to the company. Solvent extraction units show an efficiency of 93% phenol removal. The phenol recovery treatment cost is given in Table 5.7.

Table 5.7: Solvent Extraction Treatment Cost. (Yang, and Qian, 2006³⁰)

Description	Cost (\$/lb phenol recovered)
Operational Cost	0.186
Fixed Cost	0.015
Subtotal	0.201
Economic Return (Recovered Phenol sales)	-0.136
Total Cost	0.065

Air Stripping:

This technology is mainly used to remove volatile organic compounds from water streams. In this case study, this technology was used to recover acetone from waste streams with a high content of this compound; and besides, to remove phenol from wastewater streams with a very low phenol concentration for which solvent extraction is not economically recommended. The removal efficiencies for acetone and phenol air stripping units are assumed to be 97% and 95% respectively. The air stripping treatment cost is shown in Table 5.8.

Table 5.8: Air Stripping Treatment Cost

Description	Acetone Recovery (\$/lb Acet. recovered)	Phenol Removal (\$/lb phenol removed)
Operational Cost	0.125	0.143
Fixed Cost	0.0215	0.0215
Subtotal	0.1462	0.164
Economic Return (Recovered Acet. sales)	-0.113	----
Total Cost	0.033	0.164

Aeration:

Aeration is a well developed technology in the wastewater treatment industry that have as a main objective to reduce the high content of oxygen demand in wastewater streams. This goal is achieve by putting in contact the wastewater streams with air for a specific period of time. In this case study the Aeration treatment cost was determined to be 0.06 \$/lb of air diffused.

Neutralization:

Neutralization technique was used to adjust the pH in the wastewater streams to a value that complies with the environmental regulations. In this case study, the costs for acid-neutralizing and base-neutralizing were assumed to be 0.40 \$/lt of H₂SO₄ 0.5M and 0.31 \$/lt of NaOH 0.5 M respectively.

With the given process information along with the operational and property data gathered, two optimization algorithms based on mass on property integration methodologies were formulated.

5.8 Mass Integration

Direct Recycle approach was applied to this case study in order to determine the targets for minimum consumption of freshwater, minimum wastewater discharge and minimum operational cost (including freshwater and piping cost). This optimization problem was solved using LINGO optimization software. The entire program formulation that was used to develop this solution as well as the program output can be seen in Appendix D. Additional information regarding Freshwater and piping cost was needed to solve the optimization problem. The costs for Freshwater1 and Freshwater2 was determined to be 0.0006\$/lb and 0.0004\$/lb respectively. The piping cost between process sources and process units are shown in Table 5.9.

Table 5.9: Assumed Cost Pipe Coefficients

Sources Sinks	Washer 101	Decanter 101	Washer 102	Freshwater1	Freshwater2
Wash101	5	2	3	4.5	2.5
Neutralizer R104	3.5	1	5	3	1
Wash101	2	4	2	3.5	1.5

After solving the direct recycle problem using LINGO, the global solution obtained for this case study was 41815.89 \$/year with targets for minimum consumption of freshwater of 4595.lb/hr and a minimum target for waste discharge of 6969.28 lb/hr. The optimum recycle network suggested for implementing mass integration is shown in Figure 5.3

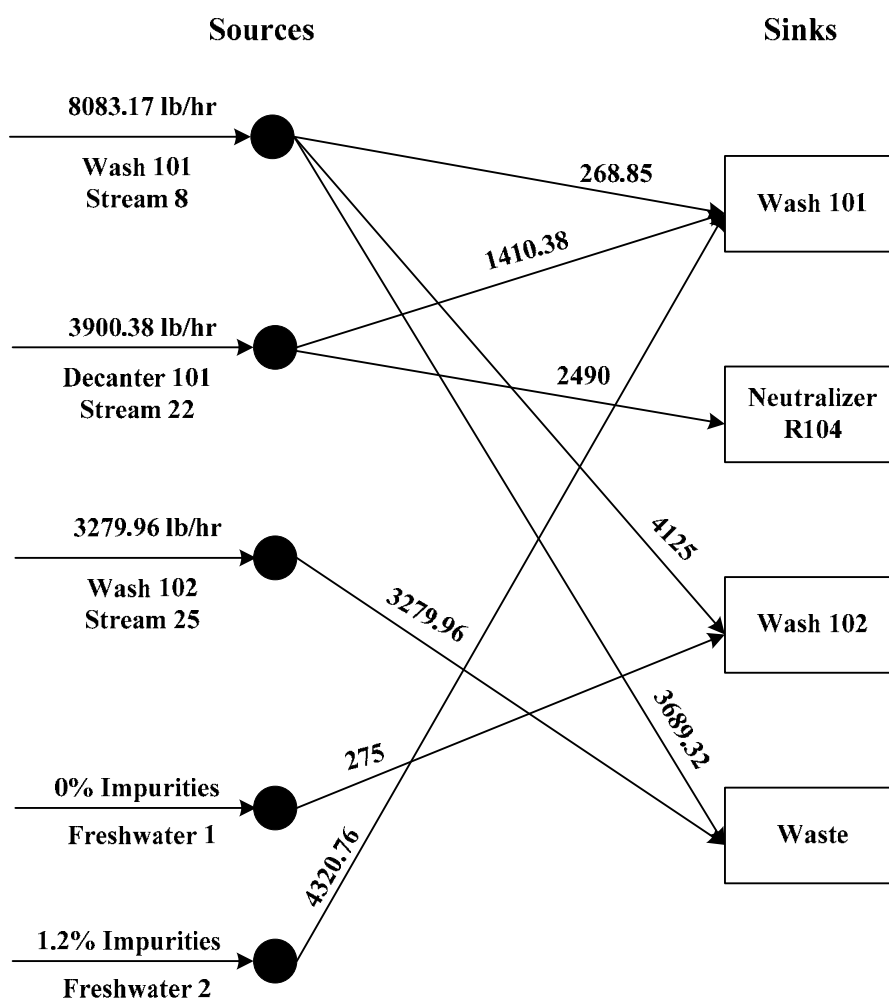


Figure 5.3: Optimized Direct Recycle Network

5.9 Property Integration

Property Integration was applied to this case study in order to minimize the pollutant content in the wastewater streams and thus the waste treatment cost for the process.

The flow diagram describing the waste treatment configuration used in this case study is shown in Figure 5.4.

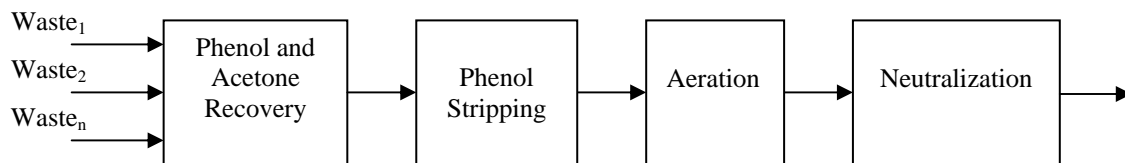


Figure 5.4: Waste Treatment Flow Diagram

Before going through the mathematical formulation developed to solve this problem, it is required to determine the mixing rules for each of the properties involved in this optimization. The mixing rules for phenol toxicity, ThOD and pH are shown in Equations 5.14 through 5.16.

- ThOD Mixing Rule

$$\overline{ThOD} (mg O_2 / l waste) = \sum_{i=1}^{N_{Sources}} x_i ThOD_i \quad (5.14)$$

- Phenol Toxicity Mixing Rule

$$\overline{Y} (\% Mortality) = -0.22 + 5.27 \sum_{i=1}^{N_{Sources}} \log(c_i) \quad (5.15)$$

where c_i is the phenol concentration in stream i .

- pH Mixing Rule:

$$10^{\overline{pH}} = \sum_{i=1}^{N_{Sources}} x_i 10^{pH_i} \quad (5.16)$$

This second formulation, developed in this work, has the aim of minimizing the cost of fresh water, piping and waste treatment simultaneously. As a result, the waste treatment cost is included in the objective function. The waste treatment cost is a function of phenol and acetone recovery, toxicity removal, oxygen demand reduction and pH adjustment processes. The description of the waste treatment process technologies, used in this case study, are stated in the following sections.

5.9.1 Phenol Recovery

Figure 5.5 showed the schematic representation of the phenol recovery process using an extraction column.

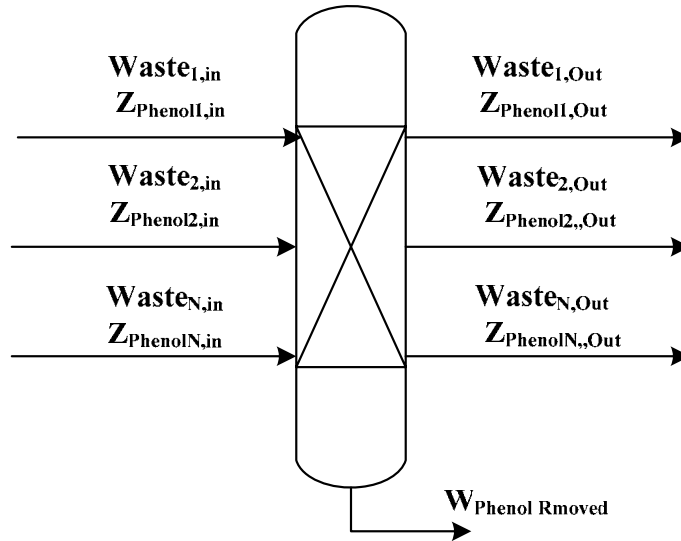


Figure 5.5: Phenol recovery process

In order to determine the total recovery cost (including phenol and acetone) for this case study, the following formulation was developed:

- *Phenol Recovered*

$$W_{i \text{ Phenol Recovered}} = (eff_{\text{Column},p} w_{i,\text{waste}} z_{i,\text{Phenol}}^{\text{in}}) I_{i,\text{phenol}} \quad (5.17)$$

where $W_{i \text{ Phenol Recovered}}$ is the flowrate of phenol removed from stream i , $eff_{\text{Column},p}$ is the removal efficiency of the extraction column and $z_{i,\text{Phenol}}^{\text{in}}$ is the phenol concentration in

waste stream i . $I_{i,phenol}$ is a binary term that takes the value of 1 if the waste stream has a phenol concentration $z_{i,Phenol}^{in}$ greater than 500ppm otherwise it become 0 (zero).

- *Phenol Remaining*

$$W_{Phenol\ Remaining} = \sum_{i=1}^{N_{Sources}} (1 - eff_{Column}) w_{i,waste} z_{Phenol}^{in} \quad (5.18)$$

where $W_{Phenol\ Remaining}$ is the total flowrate of phenol remaining in the waste streams after recovery process.

- *Waste after Phenol Recovery*

$$W_{Wastei,After\ Phenol\ Recovery} = W_{Wastei,in} - W_{Phenol\ Recovered} \quad (5.19)$$

where $W_{Wastei,After\ Phenol\ Recovery}$ is the flowrate of waste stream i after the phenol recovery process.

- *Phenol recovery Cost*

$$Phenol\ Recovery\ Cost = W_{Phenol\ Recovered} C_{Phenol\ Recover} \quad (5.20)$$

where $C_{Phenol\ Recover}$ is the cost of removing phenol.

5.9.2 Acetone Recovery

Figure 5.6 showed the schematic representation of the phenol recovery process using an air stripping column.

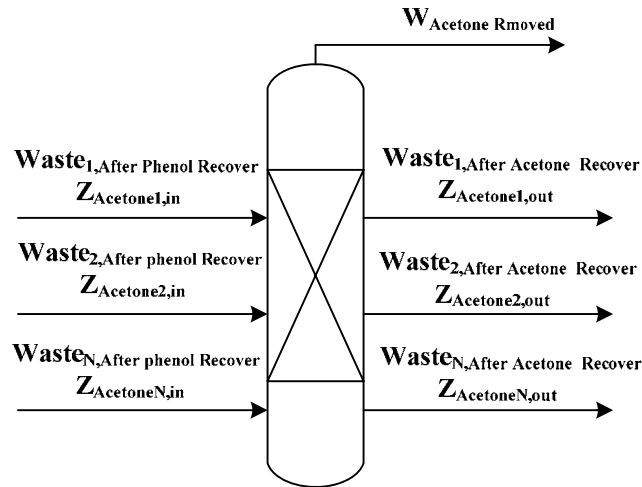


Figure 5.6: Acetone recovery process

Similarly to recovery of phenol, the following information is required:

- *Acetone Recovered*

$$W_{i \text{ Acetone Recovered}} = (eff_{Column,A} W_{i, \text{waste after Phenol Recovery}} z_{i, \text{Acetone}}^{in}) I_{i, \text{Acetone}} \quad (5.21)$$

- *Waste after Acetone Recovery*

$$W_{Waste i, \text{After Acetone Recovery}} = W_{Waste i, \text{After Phenol Recovery}} - W_{i, \text{Acetone Recovered}} \quad (5.22)$$

- *Acetone Remaining*

$$W_{Acetone \text{ Remaining}, i} = \sum_{i=1}^{N_{Sources}} (1 - eff_{Column,A}) W_{i, \text{waste}} z_{i, \text{Acetone}}^{in} \quad (5.23)$$

- *Acetone Recovery Cost*

$$\text{Acetone Recovery Cost} = W_{\text{Acetone Recovered}} C_{\text{Acetone Recover}} \quad (5.24)$$

5.9.3 Phenol Toxicity Removal

Phenol toxicity is a function of phenol concentration. Therefore, the waste streams were mixed after the acetone recovery process in order to dilute the phenol concentration, thus reducing the phenol load required to be removed. Figure 5.7 showed the schematic representation of the phenol toxicity removal treatment using an air stripping column.

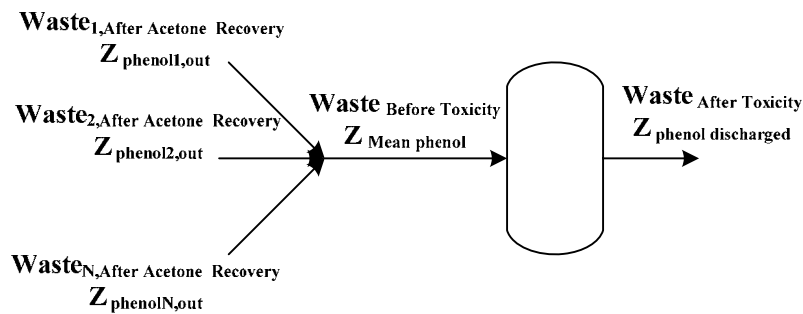


Figure 5.7: Phenol Toxicity Removal

The mathematical formulation developed to determine the cost of this process is described as follows:

- *Total Waste Entering to Toxicity Treatment*

$$Total\ Waste_{After\ Acetone\ Recovery} = \sum_{i=1}^{N_{Sources}} W_{Waste\ i, After\ Acetone\ Recovery} \quad (5.25)$$

- *Phenol Concentration Entering to Toxicity Treatment*

$$Z_{mean\ phenol} = \frac{W_{Phenol\ Remaining}}{Total\ Waste_{After\ Acetone\ Recovery}} \quad (5.26)$$

- *Concentration of Phenol Removed*

$$Z_{Phenol\ Removed} = Z_{mean\ phenol} - Z_{discharged\ Phenol} \quad (5.27)$$

where $Z_{Phenol\ Removed}$ is the phenol concentration need to be removed and $Z_{discharged\ Phenol}$ is the allowed phenol concentration to be discharged to the environment.

- *Load of Phenol Removed*

$$W_{Phenol\ Removed} = Z_{mean\ phenol} Total\ Waste_{After\ Acetone\ Recovery} \quad (5.28)$$

- *Waste After Toxicity Treatment*

$$W_{Waste\ After\ Toxicity} = Total\ Waste_{After\ Acetone\ Recovery} - W_{Phenol\ Removed} \quad (5.29)$$

- *Phenol Remaining after Toxicity*

$$W_{Phenol\ Remaining\ after\ Tox.} = Z_{discharged\ Phenol} W_{Waste\ After\ Toxicity} \quad (5.30)$$

- *Phenol Toxicity Cost*

$$PhenolToxicityCost = W_{Phenol\ Removed} C_{Phenol\ Removed} I_T \quad (5.31)$$

where $C_{Phenol\ Removed}$ is the cost of removing phenol using air stripping and I_T is a binary term that takes the value of 0 (zero) when the phenol concentration after recovery

$Z_{mean\ phenol}$ is equal to the phenol allowed discharge concentration $Z_{discharged}$; otherwise, it becomes 1.

Phenol toxicity treatment cost is constraint by the following environmental regulations:

- *Phenol Load Regulation*

$$Z_{discharged\ Phenol} W_{Waste\ After\ Toxicity} \leq 0.054 \quad (5.32)$$

- *Phenol Toxicity Regulation*

Using the toxicity mixing rule stated in equation 5.15, the phenol concentration at which the mortality is 0% was determine to be 1.10 mg_{phenol}/lt_{waste}.

$$Z_{discharged\ Phenol} \leq 0.0000011 \frac{lb_{phenol}}{lb_{waste}} \quad (5.33)$$

5.9.4 ThOD Treatment

Figure 5.8 showed the schematic representation of the phenol recovery process using an aeration basin.

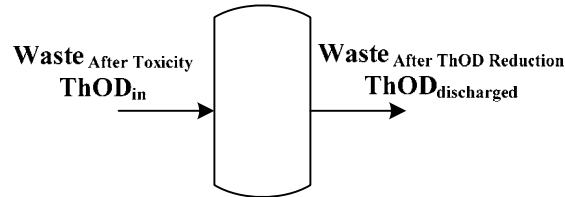


Figure 5.8: ThOD Treatment

The total ThOD value for the waste stream after toxicity treatment was calculated using the following equations.

- *Concentration of Organic Compounds in Waste Stream*

$$y_{m,WasteStream} = \frac{\sum_{i=1}^{N_{Sources}} y_{m,i} W_{i,waste}}{W_{Waste\ After\ Toxicity}} \quad (5.34)$$

Where $y_{m,i}$ is the composition of component m in stream i and $y_{m,WasteStream}$ is the final composition of component m in the waste stream after toxicity treatment.

For phenol and acetone the composition in the waste stream is calculated based on the remaining load after the toxicity treatment. This is shown in equations 5.35 and 5.36

$$y_{Phenol, WasteStream} = \frac{W_{Phenol \text{ Remaining after Tox.}}}{W_{Waste \text{ After Toxicity}}} \quad (5.35)$$

$$y_{Phenol, WasteStream} = \frac{W_{Acetone \text{ Remaining}}}{W_{Waste \text{ After Toxicity}}} \quad (5.36)$$

- *Total ThOD in Waste Stream*

$$ThOD_{Waste \text{ Stream}} = \sum_{u=1}^{N_{Organic \text{ Compound}}} y_{m, WasteStream} ThOD_m \quad (5.37)$$

where $ThOD_{Waste \text{ Stream}}$ is the total Oxygen Demand of the waste stream leaving the toxicity treatment and $ThOD_m$ is the Theoretical Oxygen Demand of component m .

The treatment cost of reducing ThOD was determined as a function of the oxygen required to be diffused in the waste stream. Therefore, the ThOD treatment cost was calculated as follows:

- *Oxygen to be Diffused*

$$W_{Oxygen \text{ Diffused}} = (ThOD_{Waste \text{ Stream}} - ThOD_{Re \text{ gulation}}) W_{Waste \text{ After Toxicity}} \quad (5.38)$$

Where $W_{Oxygen \text{ Diffused}}$ is the mass flowrate of oxygen diffused in the waste stream and

$ThOD_{Re \text{ gulation}}$ is the environmental regulation for Oxygen Demand in wastewater

streams. The Oxygen injected in this process is taken from the air. Therefore, the

amount of air required to supply the Oxygen demand is calculated using equation 5.41.

- *Air to be Diffused*

$$n_{\text{Oxygen Diffused}} = \left(\frac{W_{\text{Oxygen Diffused}}}{MW_{\text{O}_2}} \right) \quad (5.39)$$

Where $n_{\text{Oxygen Diffused}}$ are the moles of oxygen to be diffused.

Since one mol of air contents 21% of oxygen, the moles of air required to supply the demand of oxygen are calculated using equation 5.40

$$n_{\text{Air Diffused}} = \left(\frac{n_{\text{Oxygen Diffused}}}{0.21} \right) \quad (5.40)$$

where $n_{\text{Air Diffused}}$ is the total moles of air that need to be diffused.

$$W_{\text{Air Diffused}} = n_{\text{Oxygen Diffused}} MW_{\text{Air}} \quad (5.41)$$

Where $W_{\text{Air Diffused}}$ is the mass flowrate of air diffused in the waste stream and MW_{Air} is the molecular weight of air.

- *ThOD Treatment Cost*

$$\text{ThOD Treatment Cost} = W_{\text{Air Diffused}} C_{\text{Diffused Air}} \quad (5.42)$$

Where $C_{\text{Diffused Air}}$ is the cost of compressing and diffusing air into the aeration basin.

ThOD treatment cost is constraint by the following environmental regulation

$$\text{ThOD}_{\text{Regulation}} \leq 0.75 \text{ mg / lt} \quad (5.43)$$

5.9.5 Neutralization Treatment

Figure 5.9 showed the schematic representation of the pH neutralization process.

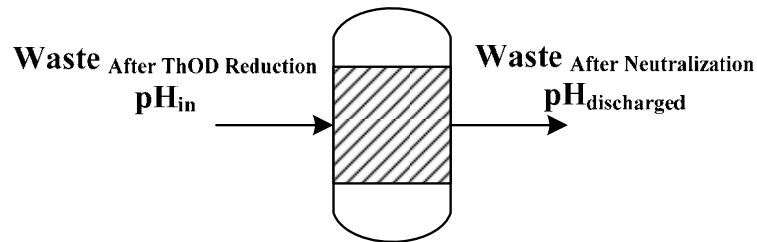


Figure 5.9: Neutralization Treatment

The treatment cost of adjusting pH was determined as a function of the amount of acid or base solution needed to neutralize the wastewater stream. Therefore, the neutralization treatment cost was calculated using the following mathematical formulation:

- *Waste Stream pH Value :*

The pH value for the waste stream after ThOD treatment is calculated by determining the fractional process stream contributions to the total waste and by applying the mixing rule stated in equation 5.16. The split stream ratio is calculated after the acetone recovery process and it is shown in equation (5.44). The stream ratio is assumed to remain constant within the process.

$$WasteRatio_i = \frac{W_{Waste\ i, After\ Acetone\ Recovery}}{Total\ Waste_{After\ Acetone\ Recovery}} \quad (5.44)$$

where $WasteRatio_i$ is the fractional contribution of waste stream i in the total waste after acetone recovery and $W_{Waste\ i, After\ Acetone\ Recovery}$ is the flowrate of waste stream i after the acetone recovery process.

The \overline{pH}_{Waste} value for the waste stream was calculated using equation 5.45.

$$10^{\overline{pH}_{Waste}} = \sum_{i=1}^{N_{Sources}} WasteRatio_i 10^{pH_i} \quad (5.45)$$

where, pH_i is the pH value of process stream i .

Two neutralization processes are available to treat either a basic or alkaline waste stream as follows:

Base Neutralization

In this case study, the alkaline waste stream is neutralized using a sodium hydroxide (NaOH) solution 0.5 M. In order to determine the cost of this treatment process the following data is required:

- *Concentration of $[OH^-]$ in Base Solution*

In this case study, it is assumed that NaOH is completely ionized and is the sole source of hydroxide ion (OH^-). Therefore, the hydroxide ion concentration in the base solution is determined to be $[OH^-] = 0.5M$ (mol / lt).

- Concentration of $[H_3O^+]$ in waste stream

The concentration of hydronium ion $[H_3O^+]_{waste}$ in the waste stream is calculated using equation 5.46.

$$[H_3O^+]_{waste} (mol/lit) = 10^{(-\overline{pH}_{Waste})} \quad (5.46)$$

where \overline{pH}_{Waste} is the pH value of the waste stream.

- Total amount of moles of $H_3O^+_{waste}$ to be treated

$$Total H_3O^+_{waste} (mol) = W_{Waste After Toxicity} / \rho_{waste} [H_3O^+]_{waste} \quad (5.47)$$

where $H_3O^+_{waste}$ are the moles of H_3O^+ required to be removed from the waste stream

and ρ_{waste} is the waste stream density.

- Total amount of moles of OH^-

The amount of moles of OH^- used to neutralize the $H_3O^+_{waste}$ concentration in the waste stream is calculated using equation 5.48.

$$Total OH^- (mol) = Base [OH^-] \quad (5.48)$$

where *Base* is the amount of base solution used to adjust the pH in the waste stream up to a value allowed for discharging into the environment.

- *Total amount of moles of H_3O^+ waste after Base Neutralization*

The number of moles of H_3O^+ _{waste, remaining} remaining after the neutralization reaction is calculated using equation 5.49

$$H_3O^+_{waste, remaining} = Total H_3O^+_{waste} - Total OH^- \quad (5.49)$$

- *Total Waste after Neutralization*

$$Total Waste = W_{Waste After Toxicity} 1/\rho_{waste} + Base \quad (5.50)$$

- *Concentration of $[H_3O^+]$ in Waste Stream after Neutralization*

$$[H_3O^+]_{waste, remaining} (mol/l) = H_3O^+_{waste, remaining} / Total Waste \quad (5.51)$$

- *pH Value after Neutralization*

$$10^{(-pH_{discharged})} = [H_3O^+]_{waste, remaining} \quad (5.52)$$

where $pH_{discharged}$ is the final pH value in the waste stream before discharging it to the environment.

- *Base Neutralization Cost*

$$TreatmentBaseCost = BaseC_{BaseSolution} I_B \quad (5.53)$$

where $C_{BaseSolution}$ is the cost of the base solution (NaOH, 0.5M) and I_B is a binary term that takes the value of 0 (zero) if no base neutralization is needed; otherwise, it becomes one (1).

Acid Neutralization

In this case study, the base waste stream is neutralized using a sulfuric acid (H_2SO_4) solution 0.5 M. Similarly to base neutralization treatment, the following data is required:

- *Concentration of $[H_3O^+]$ in Acid Solution*

In this case study, it is assumed that H_2SO_4 is completely ionized and is the sole source of hydroxide ion H_3O^+ . Therefore, the hydronium ion concentration in the acid solution is determined to be $[OH^-] = 0.5M$ (mol / lt) .

- *Concentration of $[OH^-]$ in waste stream*

The concentration of hydroxide ion $[OH^-]_{waste}$ in the waste stream is calculated using equation 5.54.

$$[OH^-]_{waste} (mol / lt) = 10^{(-\overline{pOH}_{waste})} \quad (5.54)$$

where \overline{pOH}_{waste} is the mathematically represented in equation 5.55

$$\overline{pOH}_{waste} = 14 - \overline{pH}_{waste} \quad (5.55)$$

- *Total amount of moles of OH^- to be treated*

$$Total\ OH^-_{waste}\ (mol) = W_{Waste\ After\ Toxicity}\ 1/\rho_{waste}\ [OH^-] \quad (5.56)$$

where OH^-_{waste} are the moles of OH^- required to be removed from the waste stream.

- *Total amount of moles of H_3O^+*

The amount of moles of H_3O^+ used to neutralize the OH^-_{waste} concentration in the waste stream is calculated using equation 5.57.

$$Total\ H_3O^+\ (mol) = 2Acid\ [H_3O^+] \quad (5.57)$$

where Acid is the amount of base solution used to adjust the pH in the waste stream up to a value allowed for discharging into the environment. This equation is multiplied by a factor of 2 because there are two acidic hydrogens.

- *Total amount of moles of OH^-_{waste} after Acid Neutralization*

The number of moles of $OH^-_{waste, remaining}$ remaining after the neutralization reaction is calculated using equation 5.49

$$OH^-_{waste, remaining} = Total\ OH^- - Total\ H_3O^+ \quad (5.58)$$

- *Total Waste after Acid Neutralization*

$$Total\ Waste = W_{Waste\ After\ Toxicity}\ 1/\rho_{waste} + Acid \quad (5.59)$$

- Concentration of $[OH^-]$ in Waste Stream after Neutralization

$$[OH^-]_{waste, remaining} (mol/l) = \frac{OH^-_{waste, remaining}}{TotalWaste} \quad (5.60)$$

- pH Value after Neutralization

$$10^{(-pOH_{discharged})} = [OH^-]_{waste, remaining} \quad (5.61)$$

$$pH_{discharged} = 14 - pOH_{discharged} \quad (5.62)$$

where $pH_{discharged}$ is the final pH value in the waste stream before discharging it to the environment.

- Neutralization Cost

$$AcidTreatmentBaseCost = BaseC_{AcidSolution} I_A \quad (5.63)$$

where $C_{AcidSolution}$ is the cost of the acid solution (H_2SO_4 , 0.5M) and I_A is a binary term that takes the value of 0 (zero) if no acid neutralization is needed; otherwise, it becomes one(1).

The acid and base neutralization treatments are restricted by the following environmental constraints:

$$pH_{discharged} \leq 9 \quad (5.64)$$

$$pH_{discharged} \geq 5.5$$

(5.65)

To solve this problem that involves mass and property integration, LINGO optimization software was used to obtain the global solution. For this case study, the minimum operational cost, including waste treatment, was determined to be 111005.8 \$/year with targets for minimum consumption of freshwater of 2663.72lb/hr and a minimum target for waste discharge of 5037.72 lb/hr. The penalty that the company has to pay for complying with environmental regulations is approximately 69189.9 \$/year. The optimum recycle network suggested for implementing the proposed solution is shown in Figure 5.10

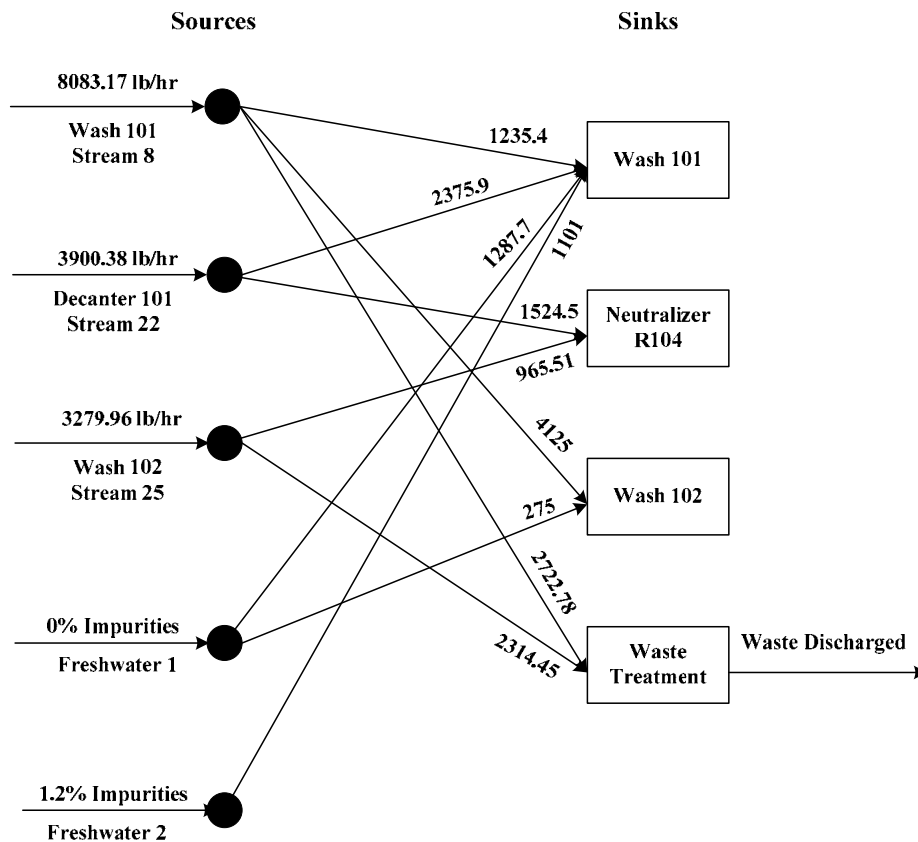


Figure 5.10: Optimized Mass-Property Direct Recycle Network

The final flowsheet diagram for the phenol process after mass and property integration is shown in figure 5.11. The description of the process sources used in this optimization is shown in Tables 5.10 and 5.11. The entire program formulation that was used to develop this solution as well as the program output can be seen in Appendix E.

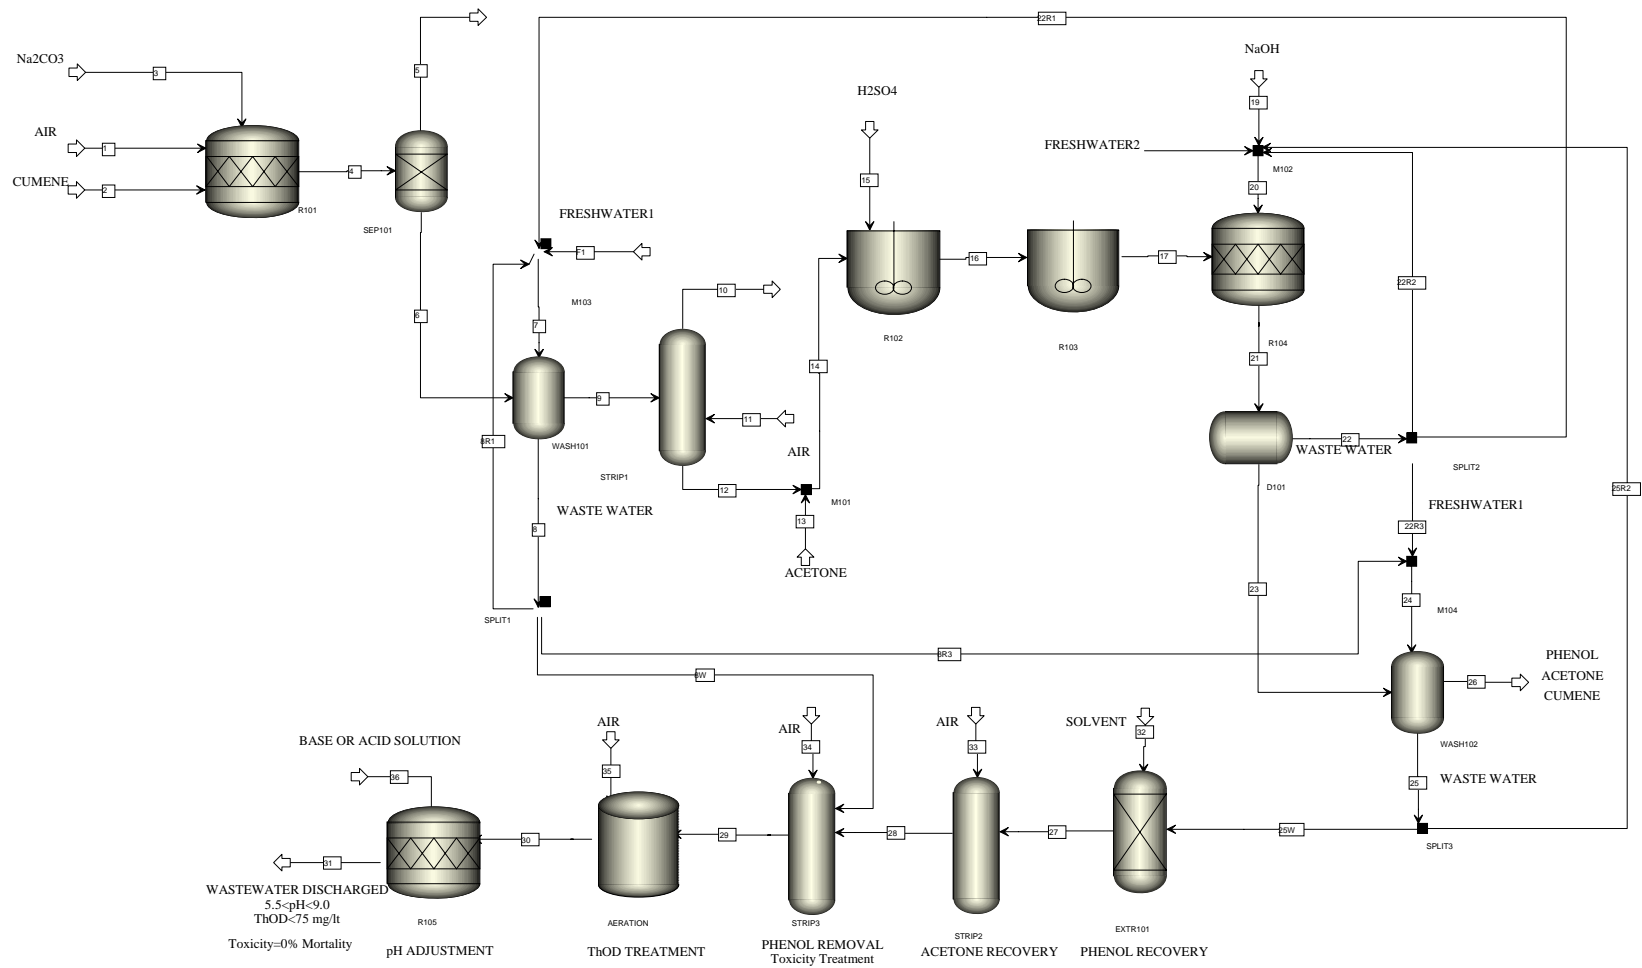


Figure 5.11: Phenol process Flowsheet Diagram after Optimization

Table 5.10: Waste Stream Data

Process Streams	Flowrate lb/hr	Phenol Mass fraction ppm	Acetone Mass fraction ppm	pH	Toxicity % Mortality	ThOD gO₂/l
Wash101 8	8083.019	17	---	6.68	89.6	0.187
Wash101 8W	2783.968	17	---	6.68	89.6	0.064
Wash102 25	3279.96	24000	28000	5.69	100	92.16
Wash102 25W	2249.94	24000	28000	5.69	100	63.21
Extr101 27	2199.73	1700	28000	5.69	100	52.65
Strip2 30	2137.99	1700	589	5.69	100	4.69
Strip3 33	4918.182	1.1	256	6.46 5	0	1.625
Aeration 34	4918.182	1.1	256	6.46 5	0	0.075
R105 35	4918.182	1.1	256	6.46 5	0	0.075

Table 5.11: Recycle Stream Data

Process Streams	Flowrate lb/hr	Phenol Mass fraction (ppm)	Acetone Mass fraction (ppm)
Wash101 (8R1)	2036.29	17	----
Wash101 (8R2)	1233.27	17	----
Wash101 (8R3)	2029.62	17	----
D101 (22R1)	2262.59	13000	10000
D101 (22R2)	240.87	13000	10000
D101 (22R3)	1396.91	13000	10000
Wash102 (25R1)	14.16	24000	28000
Wash102 (25R2)	1015.84	24000	28000

CHAPTER VI

CONCLUSIONS AND RECOMMENDATIONS

A new approach has been developed to simultaneously address component-based recycle constraints as well as property-based discharge constraints. The problem was represented as a source-sink mapping task. Mass- and property-integration techniques were included in the approach. Two mathematical formulations were developed. In the first formulation, the objective was to minimize fresh consumption while satisfying all the process constraints for recycle. In the second formulation, cost of waste treatment was added. Also, component- and property-based discharge constraints were included to account for the environmental regulations and the waste-treatment activities. The proposed optimization technique serves as a tool to evaluate the extra cost that the company has to pay either in fresh resources or waste treatment cost in order to comply with the environmental regulations. The developed optimization technique was applied to a case study on production of phenol.

The following research activities are recommended for future work:

1. Include heat integration for process modification (In addition of mass and property integration).
2. Developing mixing rules for the different properties that regulate the discharge of wastewater into the environment such as hardness, turbidity, odor, conductivity, etc.

3. Developing a toxicity mixing rule that measures the adverse effect caused when two or more toxicants are mixed. Developing a systematic methodology to address the unsteady state operation base on mass and property integration simultaneously.
4. Include scheduling issues; it could be beneficial when the same waste treatment plant is used to treat the waste of different process.
5. Generate an alternative rerouting network for the wastewater discharged to the environment.

LITERATURE CITED

- (1) El-Halwagi, M. M. *Process Integration*. Academic Press: New York, 2006.
- (2) El-Halwagi, M. M. *Pollution Prevention through Process Integration: Systematic Design Tools*. Academic Press: San Diego, 1997.
- (3) El-Halwagi, M. M.; Spriggs H. D. Solve Design Puzzles with Mass Integration. *Chem. Eng. Prog.* **1998**, *94*, 25-44.
- (4) El-Halwagi, M. M.; Manousiouthakis, V. Synthesis of Mass Exchange Networks. *AIChE J.* **1989**, *35*(8), 1233-1244.
- (5) Hallale, N.; Fraser, M. D. Retrofit of Mass Exchange Networks using Pinch Technology. *AIChE J.* **2000**, *40* (10), 2112-2117.
- (6) Foo, C.Y. Synthesis of Mass Exchange Network for Batch Processes. *Chemical Engineering Science.* **2004**. *59*, 1009-1026.
- (7) El-Halwagi, M. M.; Srinivas, B. K. Synthesis of Reactive Mass-Exchange Networks. *Chem. Eng. Sci.*, **1992**, *47*(8), 2113-2119.
- (8) El-Halwagi, M. M. Synthesis of Optimal Reverse-Osmosis Networks for Waste Reduction. *AIChE J.* **1992**, *38* (8), 1185-1198.
- (9) El-Halwagi, M. M. Rigorous Graphical Targeting for Resource Conservation via Material Recycle/Reuse Networks. *Ind. Eng. Chem.* **2003**, *42*, 4319-4328.
- (10) El-Halwagi, M. M.; Glasgow, I. M.; Eden, M. R.; Qin, X. Property Integration: Componentless Design Techniques and Visualization Tools. *AIChE J.* **2004**, *50*(8), 1854-1869.
- (11) Shelley, M. D.; El-Halwagi, M. M. Componentless Design of Recovery and Allocation Systems: A Functionality-Based Clustering Approach. *Comp. Chem. Eng.* **2000**, *24*, 2081-2091.
- (12) Wang, Y. P.; Smith R. Wastewater Minimization. *Chem. Eng. Sci.* **1994**, *49* (7), 981-1006.
- (13) Dhole V. R. Make Your Process Water Pay for Itself. *Chemical Engineering.* **1996**, *103*, 100-103.

- (14) El-Halwagi, M. M.; Spriggs, H. D. An Integrated Approach to Cost and Energy Efficient Pollution Prevention. *Proceedings of the Fifth World Congress of Chemical Engineering*, San Diego, 1996, 3, 344-349.
- (15) Sorin, M.; Beddard, S. The Global Pinch Point in Water Reuse Networks. *Transactions of the IChemE*. **1999**, 77, 305-308.
- (16) Polley, G. T.; Polley, H. L. Design Better Water Reuse Networks. *Chemical Engineering Progress*. **2000**, 96 (2), 47-52.
- (17) Hallale, N. A New Graphical Targeting Method for Water Minimization. *Advances in Environmental Research*. **2002**, 6 (3), 377-399.
- (18) Alva-Argaez, A. A Multi-contaminant Transshipment Model for Mass Exchange Networks and Wastewater Minimization Problems. *Comput. Chem. Eng.* **1999**, 23, 1439.
- (19) Benko, N.; Rev, E. The Use of Nonlinear Programming to Optimal Water Allocation. *Chem. Eng. Commun.* **2000**, 178, 67.
- (20) Dunn, R. F.; Wenzel, H. Process Integration Design Methods for Water Conservation and Wastewater Reduction in Industry: Part II Design for Multiple Contaminants. *J. Clean Prod. Proc.* **2001**, 3, 319.
- (21) Saveisky, M. J.; Bagajewicz, M. J. On the Optimality Conditions of Water Utilization Systems in Process Plants with Single Contaminants. *Chem. Eng. Sci.* **2000**, 55, 5035.
- (22) Saveisky, M. J.; Bagajewicz, M. J. Algorithmic Procedure to Design Water Utilization Systems Featuring a Single Contaminant in Process Plants. *Chem. Eng. Sci.* **2001**, 56, 1897.
- (23) Gabriel, F.; El-Halwagi M. M. Simultaneous Synthesis of Waste Interception and Material Reuse Networks: Problem Reformulation for Global Optimization. *Environ. Prog.* **2005**, 24, 171-180.
- (24) Shelley, M. D.; El-Halwagi, M. M. Techno-Economic Feasibility and Flowsheet Synthesis of Scrap Tire/Plastic Waste Liquefaction. *J. Elastomers and Plastics*. **1999**, 31(3), 232-254.
- (25) Qin, X.; Gabriel, F.; Harell, D.; El-Halwagi, M. M. Algebraic Techniques for Property Integration via Componentless Design. *Ind. Eng. Chem.* **2004**, 43, 3792-3798.
- (26) Kazantzi, V.; El-Halwagi, M. M. Targeting Material Reuse via Property Integration. *Chem. Eng. Prog.* **2005**, 101 (8), 28-37.

(27) Foo, C.Y. Surplus Diagram and Cascade Analysis Techniques for Targeting Property-Based Material Reuse Network. *Chem. Eng. Sci.* **2006**, *61*, 2626-2642.

(28) Soboslay, E. G. *Toxicity of Thiocyanate, Phenol and their Mixtures to Freshwater Aquatic Organisms: A Mixture Modeling Approach*. University of Pittsburgh: Pennsylvania, 1987.

(29) Nemerow, N. L. *Industrial Water Pollution*. Addison-Wesley Publishing: Menlo Park, 1978.

(30) Yang, C.; Qian, Y. Solvent Extraction Process Development and On-site Trial-plant for Phenol Removal from Industrial Coal-gasification Wastewater. *Chem. Eng.* **2006**, *117*, 179-185.

APPENDIX A

ASPEN SIMULATION RESULTS FOR THE PHENOL CASE STUDY

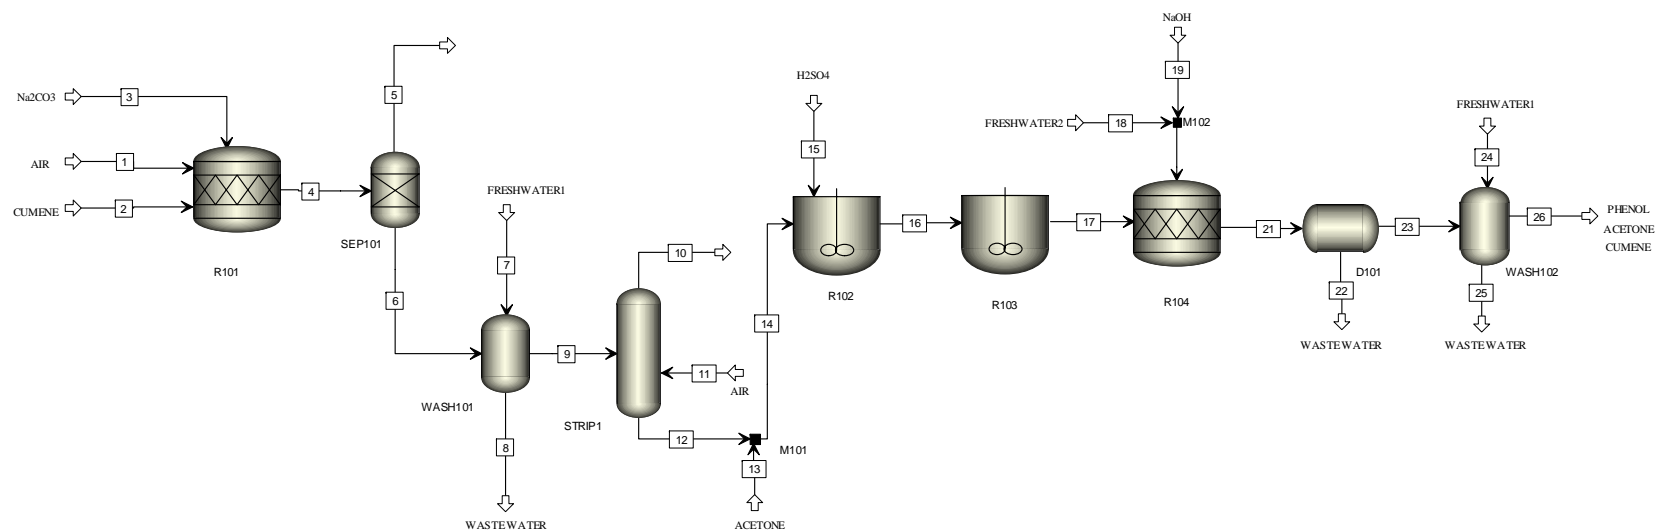


Figure A1: Aspen Process Flowsheet

Table A1: Aspen Results for Streams 1 through 9

Streams	1	2	3	4	5	6	7	8	9
Temperature F	235	221	221	228	228.5194	228.5194	217	235	235
Pressure psi	94.69595	99.69595	99.69595	94.69595	99.69595	99.69595	94.69595	80	80
Vapor Frac	0	1	0	0.490254	1	0	0	0	0
Mole Flow lbmol/hr	1525.094	1627.606	87.16476	2940.386	1297.084	1643.302	333.0506	447.8365	1528.516
Mass Flow lb/hr	183265	46608	1585	231458	36474.09	194983.9	6000	8083.169	192900.7
Volume Flow cuft/hr	3747.468	119195.1	26.07222	115588.2	96120.16	3801.957	105.093	144.5572	3782.375
Enthalpy MMBtu/hr	-16.3121	-1.71461	-10.5306	-41.4273	1.232639	-44.7226	-40.439	-53.4872	-30.7864
Mass Flow lb/hr									
WATER	30	578	1555	2168.091	21.68091	2146.41	6000	8052.509	93.90074
ISOPR-01	179978	0	0	143982.4	14.39824	143968	0	0.00E+00	143968
ACETO-01	300	0	0	300	0	300	0	8.66E-08	300
DIMET-01	2722	0	0	2722	0	2722	0	3.93E-01	2721.607
METHY-01	200	0	0	233.9514	0	233.9514	0	8.02E-09	233.9514
PHENO-01	5	0	0	5	0	5	0	0.136058	4.863942
ETHYL-01	30	0	0	0	0	0	0	0	0
SODIU-01	0	0	0	0	0	0	0	0	0
OXYGEN	0	10710	0	1118.006	1118.006	0	0	0	0
NITROGEN	0	35320	0	35320	35320	0	0	0	0
CUMEN-01	0	0	0	45578.55	0	45578.55	0	0.131605	45578.42
ACETONE	0	0	0	0	0	0	0	0	0
SULFU-01	0	0	0	0	0	0	0	0	0
SODIU-02	0	0	0	0	0	0	0	0	0
SODIU-03	0	0	0	0	0	0	0	0	0
NA+	0	0	13.01415	13.01415	0	13.01415	0	13.01414	4.44E-06
H3O+	0	0	4.52E-05	1.69E-09	0	1.96E-08	0	4.44E-09	1.51E-08
OH-	0	0	4.05E-05	1.51E-09	0	1.75E-08	0	3.97E-09	1.35E-08
CO3--	0	0	16.98585	16.98585	0	16.98585	0	16.98585	5.80E-07
SO4--	0	0	0	0	0	0	0	0	0

Table A1: Aspen Results for Streams 1 through 9 (Continuation)

Streams	1	2	3	4	5	6	7	8	9
Mass Frac									
WATER	0.000164	0.012401	0.981073	0.009367	0.000594	0.011008	1	0.996207	0.000487
ISOPR-01	0.982064	0	0	0.622067	0.000395	0.738358	0	0	0.746332
ACETO-01	0.001637	0	0	0.001296	0	0.001539	0	1.07E-11	0.001555
DIMET-01	0.014853	0	0	0.01176	0	0.01396	0	4.86E-05	0.014109
METHY-01	0.001091	0	0	0.001011	0	0.0012	0	9.92E-13	0.001213
PHENO-01	2.73E-05	0	0	2.16E-05	0	2.56E-05	0	1.68E-05	2.52E-05
ETHYL-01	0.000164	0	0	0	0	0	0	0	0
SODIU-01	0	0	0	0	0	0	0	0	0
OXYGEN	0	0.229789	0	0.00483	0.030652	0	0	0	0
NITROGEN	0	0.75781	0	0.152598	0.968359	0	0	0	0
CUMEN-01	0	0	0	0.196919	0	0.233755	0	17 PPM	0.236279
ACETONE	0	0	0	0	0	0	0	0	0
SULFU-01	0	0	0	0	0	0	0	0	0
SODIU-02	0	0	0	0	0	0	0	0	0
SODIU-03	0	0	0	0	0	0	0	0	0
NA+	0	0	0.008211	5.62E-05	0	6.67E-05	0	0.00161	2.30E-11
H3O+	0	0	2.85E-08	7.28E-15	0	1.00E-13	0	5.49E-13	7.85E-14
OH-	0	0	2.55E-08	6.51E-15	0	8.98E-14	0	4.91E-13	7.02E-14
CO3--	0	0	0.010717	7.34E-05	0	8.71E-05	0	0.002101	3.01E-12
SODIU(S)	0	0	0	0	0	0	0	0	0
SO4--	0	0	0	0	0	0	0	0	0
*** LIQUID PHASE									

pH			6.063744	6.922084		6.421538		6.680892	10.53884

Table A1: Aspen Results for Streams 10 through 18

Streams	10	11	12	13	14	15	16	17	18
Temperature F	78.54318	235	111.4509	170	204.8096	170	170	170	170
Pressure psi	0.676787	94	0.676787	15	15	15	15	15	15
Vapor Frac	1	1	0	1	0.20534	0	0.000188	0.000334	0
Mole Flow lbmol/hr	10917.04	9733.767	345.2469	289.8033	635.0502	2.755125	920.5142	935.9791	137.3966
Mass Flow lb/hr	421579.7	280000	51321.07	16387	67708.07	248	67956.07	67956.07	2490
Volume Flow cuft/hr	93155036	772091.1	815.3402	127822.7	61880.09	2.395006	1346.663	1414.736	40.44841
Enthalpy MMBtu/hr	0.959957	10.65859	-21.0877	-26.7692	-47.8569	-0.89949	-83.0049	-84.7518	-16.7031
Mass Flow lb/hr									
WATER	93.90074	0	5.90E-14	200	200	5	205	205	2459.879
ISOPR-01	140939.3	0	3028.664	0	3028.664	0	3028.664	3028.664	0
ACETO-01	236.9037	0	63.09635	0	63.09635	0	63.09635	63.09635	0
DIMET-01	209.533	0	2512.074	0	2512.074	0	2512.074	2512.074	0
METHY-01	43.53635	0	190.415	0	190.415	0	190.415	190.415	0
PHENO-01	2.196266	0	2.667675	0	2.667675	0	26609.26	28064.71	0
ETHYL-01	0	0	0	0	0	0	0	0	0
SODIU-01	0	0	0	0	0	0	0	0	0
OXYGEN	58799.73	58800	0.269867	0	0.269867	0	0.269867	0.269867	0
NITROGEN	221199.6	221200	0.391239	0	0.391239	0	0.391239	0.391239	0
CUMEN-01	54.92994	0	45523.49	0	45523.49	0	2497.149	143.5051	0
ACETONE	0	0	0	16187	16187	0	32606.75	33504.94	0
SULFU-01	0	0	0	0	0	243	243	243	0
SODIU-02	0	0	0	0	0	0	0	0	0
SODIU-03	0	0	0	0	0	0	0	0	0
NA+	0	0	4.44E-06	0	4.44E-06	0	4.44E-06	4.44E-06	13.06662
H3O+	0	0	1.51E-08	0	3.67E-10	0	3.67E-10	3.67E-10	3.58E-05
OH-	0	0	1.35E-08	0	3.28E-10	0	3.28E-10	3.28E-10	3.20E-05
CO3--	0	0	5.80E-07	0	5.80E-07	0	5.80E-07	5.80E-07	17.05434
SO4--	0	0	0	0	0	0	0	0	0

Table A2: Aspen Results for Streams 10 through 18 (Continuation)

Streams	10	11	12	13	14	15	16	17	18
Mass Frac									
WATER	0.000223	0	1.15E-18	0.012205	0.002954	0.020161	0.003017	0.003017	0.987903
ISOPR-01	0.334312	0	0.059014	0	0.044731	0	0.044568	0.044568	0
ACETO-01	0.000562	0	0.001229	0	0.000932	0	0.000928	0.000928	0
DIMET-01	0.000497	0	0.048948	0	0.037102	0	0.036966	0.036966	0
METHY-01	0.000103	0	0.00371	0	0.002812	0	0.002802	0.002802	0
PHENO-01	5.21E-06	0	5.20E-05	0	3.94E-05	0	0.391566	0.412983	0
ETHYL-01	0	0	0	0	0	0	0	0	0
SODIU-01	0	0	0	0	0	0	0	0	0
OXYGEN	0.139475	0.21	5.26E-06	0	3.99E-06	0	3.97E-06	3.97E-06	0
NITROGEN	0.524692	0.79	7.62E-06	0	5.78E-06	0	5.76E-06	5.76E-06	0
CUMEN-01	0.00013	0	0.887033	0	0.67235	0	0.036747	0.002112	0
ACETONE	0	0	0	0.987795	0.23907	0	0.479821	0.493038	0
SULFU-01	0	0	0	0	0	0.979839	0.003576	0.003576	0
SODIU-02	0	0	0	0	0	0	0	0	0
SODIU-03	0	0	0	0	0	0	0	0	0
NA+	0	0	8.66E-11	0	6.56E-11	0	6.54E-11	6.54E-11	0.005248
H3O+	0	0	2.95E-13	0	5.42E-15	0	5.40E-15	5.40E-15	1.44E-08
OH-	0	0	2.64E-13	0	4.85E-15	0	4.83E-15	4.83E-15	1.29E-08
CO3--	0	0	1.13E-11	0	8.56E-12	0	8.53E-12	8.53E-12	0.006849
SODIU(S)	0	0	0	0	0	0	0	0	0
SO4--	0	0	0	0	0	0	0	0	0
*** LIQUID PHASE ***									
pH					8.109693		11.80652	11.80778	6.314194

Table A3: Aspen Results for Streams 19 through 26

Streams	19	20	21	22	23	24	25	26
Temperature F	170	170.0492	200	190	190	170	180	180
Pressure psi	15	15	15	15	15	15	15	15
Vapor Frac	0	0	0	0	0	0	0	0
Solid Frac	0	0	0	0	0	0	0	0
Mole Flow lbmol/hr	69.019	206.4156	1142.395	212.5777	929.817	244.2371	151.6109	1022.443
Mass Flow lb/hr	1450	3940	71896.07	3900.383	67995.69	4400	3279.965	69115.73
Volume Flow cuft/hr	29.44149	69.89029	1371.366	67.44603	1305.094	74.84027	69.78147	1299.385
Enthalpy MMBtu/hr	-8.13427	-24.8373	-107.638	-25.8115	-81.2544	-29.8968	-17.8476	-92.6247
Mass Flow lb/hr								
WATER	1074.074	3533.953	3828.222	3804.664	23.55753	4400	2549.122	1874.434
ISOPR-01	0	0	3028.664	0	3028.664	0	0.291901	3028.372
ACETO-01	0	0	63.09635	1.90E-08	63.09635	0	3.252472	59.84388
DIMET-01	0	0	2512.074	1.19E-06	2512.074	0	0.00028	2512.074
METHY-01	0	0	190.415	0	190.415	0	0.221426	190.1936
PHENO-01	0	0	28064.71	50.85386	28013.86	0	79.50387	27934.35
ETHYL-01	0	0	0	0	0	0	0	0
SODIU-01	0	0	0	0	0	0	0	0
OXYGEN	0	0	0.269867	0.269867	0	0	0	0
NITROGEN	0	0	0.391239	0.391239	0	0	0	0
CUMEN-01	0	0	143.5051	0	143.5051	0	0.211885	143.2932
ACETONE	0	0	33504.94	38.48003	33466.47	0	93.30667	33373.16
SULFU-01	0	0	0	0	0	0	0	0
SODIU-02	375.9259	375.9259	177.7336	0.11446	177.6192	0	177.6191	4.74E-09
SODIU-03	0	0	351.9236	0.004636	351.919	0	351.9188	9.39E-09
NA+	0	13.06662	13.06663	2.431449	10.63518	0	10.63517	7.17E-07
H3O+	3.38E-06	3.15E-05	0.00013	2.41E-05	0.000106	0	0.000105	7.07E-07
OH-	3.02E-06	2.82E-05	0.000116	2.16E-05	9.44E-05	0	9.37E-05	6.32E-07
CO3--	0	17.05434	17.05434	3.173486	13.88086	0	13.88085	9.36E-07
SO4--	0	0	0	0	0	0	0	0

Table A3: Aspen Results for Streams 19 through 26 (Continuation)

Streams	19	20	21	22	23	24	25	26
Mass Frac								
WATER	0.740741	0.896942	0.053247	0.975459	0.000346	1	0.77718	0.02712
ISOPR-01	0	0	0.042126	0	0.044542	0	8.90E-05	0.043816
ACETO-01	0	0	0.000878	4.87E-12	0.000928	0	0.000992	0.000866
DIMET-01	0	0	0.03494	3.05E-10	0.036945	0	8.53E-08	0.036346
METHY-01	0	0	0.002648	0	0.0028	0	6.75E-05	0.002752
PHENO-01	0	0	0.390351	0.013038	0.411995	0	0.024239	0.404168
ETHYL-01	0	0	0	0	0	0	0	0
SODIU-01	0	0	0	0	0	0	0	0
OXYGEN	0	0	3.75E-06	6.92E-05	0	0	0	0
NITROGEN	0	0	5.44E-06	0.0001	0	0	0	0
CUMEN-01	0	0	0.001996	0	0.002111	0	6.46E-05	0.002073
ACETONE	0	0	0.466019	0.009866	0.492185	0	0.028447	0.482859
SULFU-01	0	0	0	0	0	0	0	0
SODIU-02	0.259259	0.095413	0.002472	2.93E-05	0.002612	0	0.054153	6.86E-14
SODIU-03	0	0	0.004895	1.19E-06	0.005176	0	0.107293	1.36E-13
NA+	0	0.003316	0.000182	0.000623	0.000156	0	0.003242	1.04E-11
H3O+	2.33E-09	7.99E-09	1.80E-09	6.19E-09	1.55E-09	0	3.20E-08	1.02E-11
OH-	2.08E-09	7.15E-09	1.61E-09	5.53E-09	1.39E-09	0	2.86E-08	9.15E-12
CO3--	0	0.004329	0.000237	0.000814	0.000204	0	0.004232	1.35E-11
SODIU(S)	0	0	0	0	0	0	0	0
SO4--	0	0	0	0	0	0	0	0
*** LIQUID PHASE ***								
pH	6.396411	6.367118	6.463553	6.463553	6.479854		5.695106	8.695106

APPENDIX B**IMPURITY CONCENTRATION CALCULATIONS FOR PROCESS SOURCES**

- *Wash101(stream 8)*

From Aspen:

Total Flowrate (lb/hr) = 8083.17

Impurity Flowrate (lb/hr) = 128.379

Mass Impurity Concentration:

$$y_{Wash101} = \frac{128.379}{8083.17} = 0.016$$

- *Decanter101(stream 22)*

From Aspen:

Total Flowrate (lb/hr) = 3900.383

Impurity Flowrate (lb/hr) = 95.718

Mass Impurity Concentration:

$$y_{Decanter101} = \frac{95.718}{3900.383} = 0.024$$

- *Washer102(stream 25)*

From Aspen:

Total Flowrate (lb/hr) = 730.842

Impurity Flowrate (lb/hr) = 3279.96

Mass Impurity Concentration:

$$y_{Decanter101} = \frac{730.842}{3279.96} = 0.22$$

- *Freshwater2(stream 18)*

From Aspen:

Total Flowrate (lb/hr) = 2490

Impurity Flowrate (lb/hr) = 30.121

Mass Impurity Concentration:

$$y_{Decanter101} = \frac{30.121}{2490} = 0.012$$

APPENDIX C

TOXICITY CALCULATIONS FOR PROCESS SOURCES

Probit Equation

$$Y = -0.22 + 5.27 \log C \text{ (phenol concentration ppm)}$$

Process Sources

- *Wash101(stream 8)*

$$Y_{Wash101} = -0.22 + 5.27 \log(17)$$

$$Y_{Wash101} = 6.26$$

Probit value is transformed to percentage % using Table 5.4

$$\text{Mortality \%} = 89.6$$

- *Decanter101(stream 22)*

$$Y_{Wash101} = -0.22 + 5.27 \log(13000)$$

$$Y_{Wash101} = 21.46$$

Probit value is transformed to percentage % using Table 5.4

$$\text{Mortality \%} = 100$$

- *Wash102(stream 25)*

$$Y_{Wash101} = -0.22 + 5.27 \log(24000)$$

$$Y_{Wash101} = 22.86$$

Probit value is transformed to percentage % using Table 5.4

$$\text{Mortality \%} = 100$$

APPENDIX D
LINGO PROGRAM AND OUTPUT FOR PHENOL CASE STUDY
(PROCESS CONSTRAINTS)

min=TotalCost;

TotalCost=CostFreshwater+PipingCost;

!Input;

!Sources Flowrates;

Wwash101=8083.169;

WD101=3900.383;

Wwash102=3279.965;

!Sinks Flowrates;

Gwash101=6000;

GR104=2490;

Gwash102=4400;

!Sinks Max. Inlet Impurity Composition;

Zwash101<0.015;

ZR104<=0.1;

Zwash102<0.015;

!Cost of freshwater;

CostFreshwater=(0.0006*Freshwater1+0.0004*Freshwater2)*8000;

Freshwater1=F11+F12+F13;

Freshwater2=F21+F22+F23;

!Source Balance;

Wwash101=W11+W12+W13+Waste1;

WD101=W21+W22+W23+Waste2;

Wwash102=W31+W32+W33+Waste3;

!Sink Balance;

$$Gwash101=W11+W21+W31+F11+F21;$$

$$GR104=W12+W22+W32+F12+F22;$$

$$Gwash102=W13+W23+W33+F13+F23;$$

!Component Balance;

$$Gwash101*Zwash101=W11*0.016+W21*0.024+W31*0.22+F21*0.012;$$

$$GR104*ZR104=W12*0.016+W22*0.024+W32*0.22+F22*0.012;$$

$$Gwash102*Zwash102=W13*0.016+W23*0.024+W33*0.22+F23*0.012;$$

!Waste;

$$Waste=Waste1+Waste2+Waste3;$$

!Piping Cost;

$$PipingCost=W11*5+W12*3.5+W13*2+W21*2+W22*1+W23*4+W31*3+W32*5+W33*2+F11*4.5+F12*3+F13*3.5+F21*2.5+F22*1+F23*1.5;$$

!Non-Negative Constraints;

$$W11>0;$$

$$W12>0;$$

$$W13>0;$$

$$W21>0;$$

$$W22>0;$$

$$W23>0;$$

$$W31>0;$$

$$W32>0;$$

$$W33>0;$$

$$Zwash101>0;$$

$$ZR104>0;$$

$$Zwash102>0;$$

$$Freshwater1 \geq 0;$$

$$Freshwater2 \geq 0;$$

$$F11>0;$$

$$F12>0;$$

$$F13>0;$$

$$F21>0;$$

$$F22>0;$$

$$F23>0;$$

end

Lingo Output

Global optimal solution found.

Objective value: 41815.89
 Total solver iterations: 11

Variable	Value	Reduced Cost
TOTALCOST	41815.89	0.000000
COSTFRESHWATER	15146.45	0.000000
PIPINGCOST	26669.44	0.000000
WWASH101	8083.169	0.000000
WD101	3900.383	0.000000
WWASH102	3279.965	0.000000
GWASH101	6000.000	0.000000
GR104	2490.000	0.000000
GWASH102	4400.000	0.000000
ZWASH101	0.1500000E-01	0.000000
ZR104	0.2400000E-01	0.000000
ZWASH102	0.1500000E-01	0.000000
FRESHWATER1	275.0000	0.000000
FRESHWATER2	4320.766	0.000000
F11	0.000000	1.500000
F12	0.000000	5.200000
F13	275.0000	0.000000
F21	4320.766	0.000000
F22	0.000000	1.600000
F23	0.000000	1.125000
W11	268.8510	0.000000
W12	0.000000	0.9000000
W13	4125.000	0.000000
WASTE1	3689.318	0.000000
W21	1410.383	0.000000
W22	2490.000	0.000000
W23	0.000000	6.750000
WASTE2	0.000000	1.600000
W31	0.000000	33.70000
W32	0.000000	2.400000
W33	0.000000	80.32500
WASTE3	3279.965	0.000000
WASTE	6969.283	0.000000

Row	Slack or Surplus	Dual Price
1	41815.89	-1.000000
2	0.000000	-1.000000
3	0.000000	0.000000
4	0.000000	1.600000
5	0.000000	0.000000
6	0.000000	-5.175000
7	0.000000	-2.600000
8	0.000000	-2.393750
9	0.000000	1050000
10	0.7600000E-01	0.000000
11	0.000000	1732500
12	0.000000	-1.000000
13	0.000000	-4.800000
14	0.000000	-3.200000
15	0.000000	0.000000
16	0.000000	-1.600000
17	0.000000	0.000000
18	0.000000	7.800000
19	0.000000	2.600000
20	0.000000	8.300000
21	0.000000	-175.0000
22	0.000000	0.000000
23	0.000000	-393.7500
24	0.000000	0.000000
25	0.000000	-1.000000
26	268.8510	0.000000
27	0.000000	0.000000
28	4125.000	0.000000
29	1410.383	0.000000
30	2490.000	0.000000
31	0.000000	0.000000
32	0.000000	0.000000
33	0.000000	0.000000
34	0.000000	0.000000
35	0.1500000E-01	0.000000
36	0.2400000E-01	0.000000
37	0.1500000E-01	0.000000
38	275.0000	0.000000
39	4320.766	0.000000
40	0.000000	0.000000
41	0.000000	0.000000
42	275.0000	0.000000

43	4320.766	0.000000
44	0.000000	0.000000
45	0.000000	0.000000

APPENDIX E

LINGO PROGRAM AND OUTPUT FOR PHENOL CASE STUDY

(PROPERTY CONSTRAINTS)

min=TotalCost;

TotalCost=CostFreshwater+Piping+TotalRecoveryCost+TreatmentCost;

!Input;

!Sources Flowrates;

Wwash101=8083.169;

WD101=3900.383;

Wwash102=3279.965;

!Sinks Flowrates;

Gwash101=6000;

GR104=2490;

Gwash102=4400;

!Sinks Max. Inlet Impurity Composition;

Zwash101<0.015;

ZR104<=0.1;

Zwash102<0.015;

!Cost of freshwater;

CostFreshwater=(0.0006*Freshwater1+0.0004*Freshwater2)*8000;

Freshwater1=F11+F12+F13;

Freshwater2=F21+F22+F23;

!Source Balance;

Wwash101=W11+W12+W13+Waste1;

WD101=W21+W22+W23+Waste2;

Wwash102=W31+W32+W33+Waste3;

!Sink Balance;

$$\text{Gwash101} = \text{W11} + \text{W21} + \text{W31} + \text{F11} + \text{F21};$$

$$\text{GR104} = \text{W12} + \text{W22} + \text{W32} + \text{F12} + \text{F22};$$

$$\text{Gwash102} = \text{W13} + \text{W23} + \text{W33} + \text{F13} + \text{F23};$$

!Component Balance;

$$\text{Gwash101} * \text{Zwash101} = \text{W11} * 0.016 + \text{W21} * 0.024 + \text{W31} * 0.22 + \text{F21} * 0.012;$$

$$\text{GR104} * \text{ZR104} = \text{W12} * 0.016 + \text{W22} * 0.024 + \text{W32} * 0.22 + \text{F22} * 0.012;$$

$$\text{Gwash102} * \text{Zwash102} = \text{W13} * 0.016 + \text{W23} * 0.024 + \text{W33} * 0.22 + \text{F23} * 0.012;$$

!Waste;

$$\text{Waste} = \text{Waste1} + \text{Waste2} + \text{Waste3};$$

!Piping Cost;

$$\begin{aligned} \text{PipingCost} = & \text{W11} * 5 + \text{W12} * 3.5 + \text{W13} * 2 + \text{W21} * 2 + \text{W22} * 1 + \text{W23} * 4 + \text{W31} * 3 + \text{W32} * 5 + \text{W33} * \\ & 2 + \text{F11} * 4.5 + \text{F12} * 3 + \text{F13} * 3.5 + \text{F21} * 2.5 + \text{F22} * 1 + \text{F23} * 1.5; \end{aligned}$$

!Recovery Treatment;

! 93% Recovery Phenol;

!Phenol Composition in Waste Streams;

$$\text{ZPhenol1} = 0.000017;$$

$$\text{ZPhenol2} = 0.013;$$

$$\text{ZPhenol3} = 0.024;$$

!<500 ppm, no recovery of Phenol;

$$\text{ZPhenol1} - 0.0005 \leq (1 - 0.0005) * \text{I21};$$

$$(0 - 0.0005) * (1 - \text{I21}) \leq \text{ZPhenol1} - 0.0005;$$

$$\text{ZPhenol2} - 0.0005 \leq (1 - 0.0005) * \text{I22};$$

$$(0 - 0.0005) * (1 - \text{I22}) \leq \text{ZPhenol2} - 0.0005;$$

$$\text{ZPhenol3} - 0.0005 \leq (1 - 0.0005) * \text{I23};$$

$$(0 - 0.0005) * (1 - \text{I23}) \leq \text{ZPhenol3} - 0.0005;$$

!Stream 1;

$W_{\text{RecoveryPhenol1}} = 0.93 * (W_{\text{Waste1}} * Z_{\text{Phenol1}}) * I_{21}$;
 $W_{\text{WasteafterrecoveryPh1}} = W_{\text{Waste1}} - W_{\text{RecoveryPhenol1}}$;
 $W_{\text{Phenolafterrecovery1}} = 0.07 * (W_{\text{Waste1}} * Z_{\text{Phenol1}})$;
 $\text{RecoveryCostPhenol1} = W_{\text{RecoveryPhenol1}} * 0.065 * 8000$;

!Stream 2;

$W_{\text{RecoveryPhenol2}} = 0.93 * (W_{\text{Waste2}} * Z_{\text{Phenol2}}) * I_{22}$;
 $W_{\text{WasteafterrecoveryPh2}} = W_{\text{Waste2}} - W_{\text{RecoveryPhenol2}}$;
 $W_{\text{Phenolafterrecovery2}} = 0.07 * (W_{\text{Waste2}} * Z_{\text{Phenol2}})$;
 $\text{RecoveryCostPhenol2} = W_{\text{RecoveryPhenol2}} * 0.065 * 8000$;

!Stream 3;

$W_{\text{RecoveryPhenol3}} = 0.93 * (W_{\text{Waste3}} * Z_{\text{Phenol3}}) * I_{23}$;
 $W_{\text{WasteafterrecoveryPh3}} = W_{\text{Waste3}} - W_{\text{RecoveryPhenol3}}$;
 $W_{\text{Phenolafterrecovery3}} = 0.07 * (W_{\text{Waste3}} * Z_{\text{Phenol3}})$;
 $\text{RecoveryCostPhenol3} = W_{\text{RecoveryPhenol3}} * 0.065 * 8000$;

$\text{RecoveryCostPhenol} = \text{RecoveryCostPhenol1} + \text{RecoveryCostPhenol2} +$
 $\text{RecoveryCostPhenol3}$;

! 98% Recovery Acetone;

!Acetone Composition in Waste Streams;

$Z_{\text{Acetone1}} = 0$;
 $Z_{\text{Acetone2}} = 0.01$;
 $Z_{\text{Acetone3}} = 0.028$;

!<500 ppm, no recovery of Acetone;

$Z_{\text{Acetone1}} - 0.0005 \leq (1 - 0.0005) * I_{31}$;
 $(0 - 0.0005) * (1 - I_{21}) \leq Z_{\text{Phenol1}} - 0.0005$;

$Z_{\text{Acetone2}} - 0.0005 \leq (1 - 0.0005) * I_{32}$;
 $(0 - 0.0005) * (1 - I_{22}) \leq Z_{\text{Phenol2}} - 0.0005$;

$Z_{\text{Acetone3}} - 0.0005 \leq (1 - 0.0005) * I_{33}$;
 $(0 - 0.0005) * (1 - I_{23}) \leq Z_{\text{Phenol3}} - 0.0005$;

!Stream 1;

$$\begin{aligned} W_{\text{RecoveryAcetone1}} &= 0.98 * W_{\text{aste1}} * Z_{\text{Acetone1}} * I_{31}; \\ \text{RecoveryCostAcetone1} &= W_{\text{RecoveryAcetone1}} * 0.033 * 8000; \\ W_{\text{asteafterRecoveryAc1}} &= W_{\text{asteafterrecoveryPh1}} - W_{\text{RecoveryAcetone1}}; \end{aligned}$$

!Stream 2;

$$\begin{aligned} W_{\text{RecoveryAcetone2}} &= 0.98 * W_{\text{aste2}} * Z_{\text{Acetone2}} * I_{32}; \\ \text{RecoveryCostAcetone2} &= W_{\text{RecoveryAcetone2}} * 0.033 * 8000; \\ W_{\text{asteafterRecoveryAc2}} &= W_{\text{asteafterrecoveryPh2}} - W_{\text{RecoveryAcetone2}}; \end{aligned}$$

!Stream 3;

$$\begin{aligned} W_{\text{RecoveryAcetone3}} &= 0.98 * W_{\text{aste3}} * Z_{\text{Acetone3}} * I_{33}; \\ \text{RecoveryCostAcetone3} &= W_{\text{RecoveryAcetone3}} * 0.033 * 8000; \\ W_{\text{asteafterRecoveryAc3}} &= W_{\text{asteafterrecoveryPh3}} - W_{\text{RecoveryAcetone3}}; \end{aligned}$$

$$\text{TotalWasteafterrecoveryAc} = W_{\text{asteafterRecoveryAc1}} + W_{\text{asteafterRecoveryAc2}} + W_{\text{asteafterRecoveryAc3}};$$

$$W_{\text{Acetoneafterrecovery}} = 0.02 * (W_{\text{aste1}} * 0 + W_{\text{aste2}} * 0.013 + W_{\text{aste3}} * 0.028);$$

$$\begin{aligned} \text{RecoveryCostAcetone} &= \text{RecoveryCostAcetone1} + \text{RecoveryCostAcetone2} + \\ &\text{RecoveryCostAcetone3}; \end{aligned}$$

$$\begin{aligned} Z_{\text{MeanPhenolafterrecoveryAc}} &= \\ &= (W_{\text{Phenolafterrecovery1}} + W_{\text{Phenolafterrecovery2}} + W_{\text{Phenolafterrecovery3}}) / (\text{TotalWaste} \\ &\text{afterrecoveryAc}); \end{aligned}$$

!Total Recovery Cost;

$$\text{TotalRecoveryCost} = \text{RecoveryCostPhenol} + \text{RecoveryCostAcetone};$$

!Waste Treatment;

!Toxicity Treatment;

$$Z_{\text{removedPhenol}} = (Z_{\text{MeanPhenolafterrecoveryAc}} - Z_{\text{dischargedphenol}});$$

$$W_{\text{phenolremoved}} = Z_{\text{removedPhenol}} * \text{TotalWasteafterrecoveryAc};$$

$$W_{\text{phenolremainaftertox}} = Z_{\text{dischargedphenol}} * W_{\text{asteaftertoxicity}};$$

Wasteaftertoxicity = (TotalWasteafterrecoveryAc - Wphenolremoved);

TreatmentCostToxicity = Wphenolremoved*0.164*8000*I11;

!if ZMeanPhenolafterrecoveryAc=Zdischargedphenol, no toxicity treatment;

(ZMeanPhenolafterrecoveryAc - Zdischargedphenol) <= (1-Zdischargedphenol)*I11;
(0-Zdischargedphenol)*(1- I11) <= (ZMeanPhenolafterrecoveryAc - Zdischargedphenol);

! Toxicity regulation;

Zdischargedphenol = 0.0000011;

! Mass load regulation;

Zdischargedphenol*Wasteaftertoxicity =0.00541;

! ThoD Treatment;

ywasteIsoProphil = ((Waste1*0)+(Waste2*0)+
(Waste3*0.000089))/Wasteaftertoxicity;

ywasteHydroA = (Waste1*0 + Waste2*0 + Waste3*0.000992)/Wasteaftertoxicity;

ywasteAcetonePhenone = (Waste1*0 + Waste2*0 +
Waste3*0.000068)/Wasteaftertoxicity;

ywasteDimethyl = (Waste1*0.000049 + Waste2*0 + Waste3*0)/Wasteaftertoxicity;

ywasteCumene1 = (Waste1*0.000016+ Waste2*0 +
Waste3*0.000065)/Wasteaftertoxicity;

ywastePhenol = Wphenolremainaftertox/Wasteaftertoxicity;

ywasteAcetone = WAcetoneafterrecovery/Wasteaftertoxicity;

!Total ThoD in Wastestream!

TotalThoDwaste = 2.38*10⁶ * ywastePhenol + 2.2*10⁶ * ywasteAcetone + 3.2*10⁶ *
ywasteIsoProphil + 1.51*10⁶ * ywasteHydroA + 2.53*10⁶ * ywasteAcetonePhenone +
2.70 * 10⁶*ywasteDimethyl + 2.315*10⁶ * ywasteCumene1;

$$\text{Oxygentobedifused} = (\text{TotalThoDwaste} - \text{ThODRegultion}) * \text{Wasteaftertoxicity} * 0.4535;$$

$$\text{IbOxygentobedifused} = \text{Oxygentobedifused} / 453592;$$

$$\text{Ibmolofoxygen} = (\text{IbOxygentobedifused} / 32);$$

$$\text{Ibmolofair} = \text{Ibmolofoxygen} / 0.21;$$

$$\text{Ibofair} = \text{Ibmolofair} * 29;$$

$$\text{TreatmentCostThoD} = \text{Ibofair} * 0.06 * 8000;$$

!ThoD regulation;

$$\text{ThODRegultion} \leq 75;$$

!pH Treatment;

$$\text{Waste1ratio} = \text{WasteafterRecoveryAc1} / \text{TotalWasteafterrecoveryAc};$$

$$\text{Waste2ratio} = \text{WasteafterRecoveryAc2} / \text{TotalWasteafterrecoveryAc};$$

$$\text{Waste3ratio} = \text{WasteafterRecoveryAc3} / \text{TotalWasteafterrecoveryAc};$$

$$10^{\text{pHmean}} = (\text{Waste1ratio}) * 10^{\text{pH1}} + (\text{Waste2ratio}) * 10^{\text{pH2}} + (\text{Waste3ratio}) * 10^{\text{pH3}};$$

$$\text{pOHmean} = 14 - \text{pHmean};$$

$$\text{pH1} = 6.68;$$

$$\text{pH2} = 6.46;$$

$$\text{pH3} = 5.69;$$

!Base solution NaOH 0.5M;

!Concentration of OH in Base Solution (mol/l);

$$\text{OH} = 0.5;$$

!Acid solution H2SO4 0.5M

!Concentration of H3O in Base Solution (mol/l);

$$\text{H3O} = 0.5;$$

!Concentration of H3O Waste stream (mol/l);

$$\text{WH3O} = 10^{(-\text{pHmean})};$$

!Concentration of OH Waste stream (mol/l);

$$\text{WOH} = 10^{(-\text{pOHmean})};$$

!Moles of H3O to be treated;

$$!1/\text{waterdensity} = 0.4535 \text{ l/lb};$$

$$\text{TotalH3O} = (\text{Wasteaftertoxicity} * 0.4535 * \text{WH3O});$$

!Moles of OH to be treated;

$$\text{TotalOH} = (\text{Wasteaftertoxicity} * 0.4535 * \text{WOH});$$

!Base Treatment ;

!Moles of Acid H3O remainig after Neutralization;

$$\text{IB} * \text{H3Oremaining} = (\text{TotalH3O} - (\text{IB} * \text{Base} * \text{OH})) * \text{IB};$$

!Concentration of Acid remaining in Waste Stream (mol/l);

$$\text{IB} * \text{WH3Oafterneutralization} = (\text{H3Oremaining} / \text{TotalWaste}) * \text{IB};$$

$$\text{IB} * \text{TotalWaste} = ((\text{Wasteaftertoxicity} * .4535) + (\text{IB} * \text{Base})) * \text{IB};$$

!pH Discharged;

$$(10^{(-\text{pHdischarged})}) * \text{IB} = \text{IB} * \text{WH3Oafterneutralization};$$

!cost of NaOH 0.5M = 0.31 \$/lt;

$$\text{TreatmentBaseCost} = \text{IB} * \text{Base} * 0.31 * 8000;$$

!Acid Treatment ;

!Moles of Base OH remainig after Neutralization;

$$\text{IA} * \text{OHremaining} = (\text{TotalOH} - (\text{IA} * \text{Acid} * \text{H3O} * 2)) * \text{IA};$$

!Concentration of Base remaining in Waste Stream (mol/l);

$$\text{IA} * \text{WOHafterneutralization} = (\text{OHremaining} / \text{TotalWaste}) * \text{IA};$$

$$\text{IA} * \text{TotalWaste} = ((\text{Wasteaftertoxicity} * 0.4535) + (\text{IA} * \text{Acid})) * \text{IA};$$

!pOH Discharged;

WOHafterneutralization*IA = (10^{^(-pOHdischarged))}*IA;

IA*pOHdischarged = (14 - pHdischarged)*IA;

!cost of H2SO 0.5M = 0.46 \$/lt;

TreatmentAcidCost = Acid*IA * 0.46 * 8000;

!pH constraint;

pHdischarged <9*IA;

pHdischarged >5.5*IB;

pHmean-9 <=(10000-9)*IA;

(-10000-9)*(1-IA)<=pHmean-9;

pHmean-5.5 <=(10000-5.5)*(1-IB);

(-10000-5.5)*IB<=pHmean-5.5;

!Total Treatment Cost;

TreatmentCost = TreatmentCostToxicity + TreatmentCostThoD +TreatmentAcidCost
+TreatmentBaseCost;

!Non-Negative Constraints;

W11>0;

W12>0;

W13>0;

W21>0;

W22>0;

W23>0;

W31>0;

W32>0;

W33>0;

Zwash101>0;

ZR104>0;

Zwash102>0;

Freshwater1>=0;

Freshwater2>=0;

F11>0;

F12>0;

F13>0;

F21>0;

F22>0;
F23>0;
Acid>0;
Base>0;
Zdischargedphenol>0;

@bin(I11);

@bin(I21);

@bin(I22);

@bin(I23);

@bin(I31);

@bin(I32);

@bin(I33);

@bin(IA);

@bin(IB);

End

Lingo Output

Global optimal solution found.

Objective value: 111005.8

Extended solver steps: 2

Total solver iterations: 553

Variable	Value	Reduced Cost
TOTALCOST	111005.8	0.000000
COSTFRESHWATER	11024.20	0.000000
PIPINGCOST	35040.44	0.000000
TOTALRECOVERYCOST	43628.77	0.000000
TREATMENTCOST	21312.43	0.000000
WWASH101	8083.169	0.000000
WD101	3900.383	0.000000
WWASH102	3279.965	0.000000
GWASH101	6000.000	0.000000
GR104	2490.000	0.000000
GWASH102	4400.000	0.000000
ZWASH101	0.1500000E-01	0.000000
ZR104	0.1000000	0.000000
ZWASH102	0.1500000E-01	0.000000
FRESHWATER1	1562.689	0.000000
FRESHWATER2	1101.029	0.000000
F11	1287.689	0.000000
F12	0.000000	0.000000
F13	275.0000	0.000000
F21	1101.029	0.000000
F22	0.000000	0.000000
F23	0.000000	0.000000
W11	1235.389	0.000000
W12	0.000000	0.000000
W13	4125.000	0.000000
WASTE1	2722.780	0.000000
W21	2375.893	0.000000
W22	1524.490	0.000000
W23	0.000000	0.000000
WASTE2	0.000000	11.49690
W31	0.000000	0.000000
W32	965.5102	0.000000
W33	0.000000	0.000000
WASTE	5037.235	0.000000

ZPHENOL1	0.1700000E-04	0.000000
ZPHENOL2	0.1300000E-01	0.000000
ZPHENOL3	0.2400000E-01	0.000000
I21	0.000000	22.37816
I22	1.000000	0.000000
I23	1.000000	26854.86
WRECOVERYPHENOL1	0.000000	0.000000
WASTEAFTERRECOVERYPH1	2722.780	0.000000
WPHENOLAFTERRECOVERY1	0.3240109E-02	0.000000
RECOVERYCOSTPHENOL1	0.000000	0.000000
WRECOVERYPHENOL2	0.000000	0.000000
WASTEAFTERRECOVERYPH2	0.000000	0.000000
WPHENOLAFTERRECOVERY2	0.000000	0.000000
RECOVERYCOSTPHENOL2	0.000000	0.000000
WRECOVERYPHENOL3	51.65863	0.000000
WASTEAFTERRECOVERYPH3	2262.796	0.000000
WPHENOLAFTERRECOVERY3	3.888284	0.000000
RECOVERYCOSTPHENOL3	26862.49	0.000000
RECOVERYCOSTPHENOL	26862.49	0.000000
ZACETONE1	0.000000	0.000000
ZACETONE2	0.1000000E-01	0.000000
ZACETONE3	0.2800000E-01	0.000000
I31	0.000000	0.000000
I32	1.000000	0.000000
I33	1.000000	16756.90
WRECOVERYACETONE1	0.000000	0.000000
RECOVERYCOSTACETONE1	0.000000	0.000000
WASTEAFTERRECOVERYAC1	2722.780	0.000000
WRECOVERYACETONE2	0.000000	0.000000
RECOVERYCOSTACETONE2	0.000000	0.000000
WASTEAFTERRECOVERYAC2	0.000000	0.000000
WRECOVERYACETONE3	63.50864	0.000000
RECOVERYCOSTACETONE3	16766.28	0.000000
WASTEAFTERRECOVERYAC3	2199.288	0.000000
TOTALWASTEAFTERRECOVERYAC	4922.068	0.000000
WACETONEAFTERRECOVERY	1.296095	0.000000
RECOVERYCOSTACETONE	16766.28	0.000000
ZMEANPHENOLAFTERRECOVERYAC	0.7906279E-03	0.000000
ZREMOVEDPHENOL	0.7895279E-03	0.000000
ZDISCHARGEDPHENOL	0.1100000E-05	0.000000
WPHENOLREMOVED	3.886110	0.000000
WPHENOLREMAINAFTERTOX	0.5410000E-02	0.000000
WASTEAFTERTOXICITY	4918.182	0.000000

TREATMENTCOSTTOXICITY	5098.576	0.000000
I11	1.000000	5098.575
YWASTEISOPROPHIL	0.4188265E-04	0.000000
YWASTEHYDROA	0.4668268E-03	0.000000
YWASTEACETONEPHENONE	0.3200023E-04	0.000000
YWASTEDIMETHYL	0.2712715E-04	0.000000
YWASTECUMENE1	0.3944629E-04	0.000000
YWASTEPHENOL	0.1100000E-05	0.000000
YWASTEACETONE	0.2635313E-03	0.000000
TOTALHODWASTE	1666.842	0.000000
OXYGENTOBEDIFUSED	3550437.	0.000000
THODREGULTION	75.00000	0.000000
IBOXYGENTOBEDIFUSED	7.827379	0.000000
IBMOLOFOXYGEN	0.2446056	0.000000
IBMOLOFAIR	1.164789	0.000000
IBOFAIR	33.77887	0.000000
TREATMENTCOSTTHOD	16213.86	0.000000
WASTE1RATIO	0.5531781	0.000000
WASTE2RATIO	0.000000	0.000000
WASTE3RATIO	0.4468219	0.000000
PHMEAN	6.457355	0.000000
PH1	6.680000	0.000000
PH2	6.460000	0.000000
PH3	5.690000	0.000000
POHMEAN	7.542645	0.000000
OH	0.5000000	0.000000
H3O	0.5000000	0.000000
WH3O	0.3488549E-06	0.000000
WOH	0.2866521E-07	0.000000
TOTALH3O	0.7780845E-03	0.000000
TOTALOH	0.6393475E-04	0.000000
IB	0.000000	0.000000
H3OREMAINING	0.000000	0.000000
BASE	0.000000	0.000000
WH3OAFTERNEUTRALIZATION	0.000000	0.000000
TOTALWASTE	0.000000	0.000000
PHDISCHARGED	0.000000	0.000000
TREATMENTBASECOST	0.000000	0.000000
IA	0.000000	0.000000
OHREMAINING	0.000000	0.000000
ACID	0.000000	0.000000
WOHAFTERNEUTRALIZATION	0.000000	0.000000
POHDISCHARGED	0.000000	0.000000
TREATMENTACIDCOST	0.000000	0.000000

Row	Slack or Surplus	Dual Price
1	111005.89	-1.000000
2	0.000000	-1.000000
3	0.000000	2.622206
4	0.000000	1.533309
5	0.000000	-25.14467
6	0.000000	-2.758318
7	0.000000	8.811214
8	0.000000	-2.758318
9	0.000000	816672.8
10	0.000000	338919.2
11	0.000000	598893.4
12	0.000000	-1.000000
13	0.000000	-4.800000
14	0.000000	-3.166654
15	0.000000	-2.622206
16	0.000000	-1.533309
17	0.000000	25.14467
18	0.000000	4.800000
19	0.000000	4.800000
20	0.000000	4.800000
21	0.000000	-136.1121
22	0.000000	-136.1121
23	0.000000	-136.1121
24	0.000000	0.000000
25	0.000000	0.000000
26	0.000000	-256258.8
27	0.000000	0.000000
28	0.000000	-1301402
29	0.4830000E-03	0.000000
30	0.1700000E-04	0.000000
31	0.9870000	0.000000
32	0.1250000E-01	0.000000
33	0.9760000	0.000000
34	0.2350000E-01	0.000000
35	0.000000	-522.9745
36	0.000000	2.974475
37	0.000000	-1314.972
38	0.000000	-1.000000
39	0.000000	-522.9745
40	0.000000	2.974475
41	0.000000	-1314.972
42	0.000000	-1.000000

43	0.000000	-522.9745
44	0.000000	2.974475
45	0.000000	-1314.972
46	0.000000	-1.000000
47	0.000000	-1.000000
48	0.000000	0.000000
49	0.000000	0.000000
50	0.000000	-588665.3
51	0.5000000E-03	0.000000
52	0.1700000E-04	0.000000
53	0.9900000	0.000000
54	0.1250000E-01	0.000000
55	0.9720000	0.000000
56	0.2350000E-01	0.000000
57	0.000000	-266.9745
58	0.000000	-1.000000
59	0.000000	2.974475
60	0.000000	-266.9745
61	0.000000	-1.000000
62	0.000000	2.974475
63	0.000000	-266.9745
64	0.000000	-1.000000
65	0.000000	2.974475
66	0.000000	2.974475
67	0.000000	-4556.219
68	0.000000	-1.000000
69	0.000000	-6472238
70	0.000000	-1.000000
71	0.000000	-6472238
72	0.000000	-1314.972
73	0.000000	-4929.000
74	0.000000	2.973028
75	0.000000	-1.000000
76	0.9992314	0.000000
77	0.7675424E-03	0.000000
78	0.000000	0.1260463E+11
79	0.000000	-2566477.
80	0.000000	-0.3259391E+08
81	0.000000	-0.1538025E+08
82	0.000000	-0.2576956E+08
83	0.000000	-0.2750111E+08
84	0.000000	-0.2357965E+08
85	0.000000	-0.2424172E+08
86	0.000000	-0.2240831E+08

87	0.000000	-10.18560
88	0.000000	-0.4566722E-02
89	0.000000	-2071.429
90	0.000000	-66285.71
91	0.000000	-13920.00
92	0.000000	-480.0000
93	0.000000	-1.000000
94	0.000000	10.18560
95	0.000000	0.000000
96	0.000000	0.000000
97	0.000000	0.000000
98	-0.1795823E-04	0.000000
99	0.000000	0.000000
100	0.000000	0.000000
101	0.000000	0.000000
102	0.000000	0.000000
103	0.000000	0.000000
104	0.000000	0.000000
105	0.000000	0.000000
106	0.000000	0.000000
107	0.000000	0.000000
108	0.000000	0.000000
109	0.000000	0.000000
110	0.000000	0.000000
111	0.000000	0.000000
112	0.000000	0.000000
113	0.000000	-1.000000
114	0.000000	0.000000
115	0.000000	0.000000
116	0.000000	0.000000
117	0.000000	0.000000
118	0.000000	0.000000
119	0.000000	-1.000000
120	0.000000	0.000000
121	0.000000	0.000000
122	2.534619	0.000000
123	10006.47	0.000000
124	9993.535	0.000000
125	0.9653808	0.000000
126	0.000000	-1.000000
127	2036.297	0.000000
128	1233.279	0.000000
129	2029.625	0.000000
130	2262.593	0.000000

131	240.8730	0.000000
132	1396.917	0.000000
133	14.16824	0.000000
134	1015.848	0.000000
135	0.000000	0.000000
136	0.1500000E-01	0.000000
137	0.1000000	0.000000
138	0.1500000E-01	0.000000
139	2660.400	0.000000
140	0.000000	-0.3334564E-01
141	1686.942	0.000000
142	0.000000	0.000000
143	973.4585	0.000000
144	0.000000	0.000000
145	0.000000	0.000000
146	0.000000	0.000000
147	0.000000	0.000000
148	0.000000	0.000000
149	0.1100000E-05	0.000000

VITA

Ana Carolina Hortua was born and raised in Bogota, Colombia. She received a Bachelor of Science in chemical engineering from Universidad de America, Bogota, Colombia in June of 2002. She arrived in the USA in November of 2002 and started her master's degree in January of 2004 at Texas A&M University. During her graduate studies she was involved with Mass and Property integration methodologies. She successfully completed her Master's program in May of 2007.

Carolina's contact address: Texas A&M University, Artie McFerrin Department of Chemical Engineering, College Station, TX 77843-3122. Her email address is: carohortua@hotmail.com or ana1979@tamu.edu.