


THE PRESSURE CANNER--HOW IT WORKS

Frances L. Reasonover*


A pressure canner is used in preserving foods to raise the temperature of the food above 212° F. This temperature is necessary to destroy micro-organisms that cause spoilage.

A pressure canner is safe to use, if handled correctly. Principles for use of a pressure canner include:


1. Heat is applied to the canner. Water boils at 212° F., forming steam. Steam drives out air through the open vent. Heat begins to penetrate the jar.



2. As heating continues, air is finally exhausted. Air must be excluded because it interferes with passage of heat. Heat passes through steam more readily than through air. Heat continues to penetrate the jar.




3. The vent is closed after steam has escaped for 10 minutes. Steam now cannot escape, so pressure rises. Water under pressure boils at temperatures above 212° F. At 5 pounds gauge pressure, water boils at 228° F. At 10 pounds pressure, water boils at 240° F.




4. Heat Distribution:

A. *Conduction* is the means by which heat penetrates the jar. That is, heat passes from one molecule to another. In thick mixtures, heat movement is largely by conduction.




B. Heat is also distributed by *convection*. Heated fluids expand, rise and are replaced by cooler fluids. Convection currents are slow in thick mixtures. They are retarded by fat, tightly-packed food and solid materials. Heat penetrates by both convection and conduction at the same time.




5. Food, steam and air tend to expand as heat enters, thus increasing the pressure in the

*Extension foods and nutrition specialist, The Texas A&M University System.


jar. The 1/2-inch "headspace" in the jar acts as a cushion. Since this increasing pressure is still below canner pressure, jar contents cannot boil out against the higher canner pressure when it is held steady. Pressure and temperature in the jar are finally equal to the pressure and temperature in the canner.



- At the end of the processing time, the source of heat is removed and active boiling stops. Temperature and pressure in the canner start to fall as the cooling-off period begins. Temperature and pressure in the jar slowly follow that of the canner.

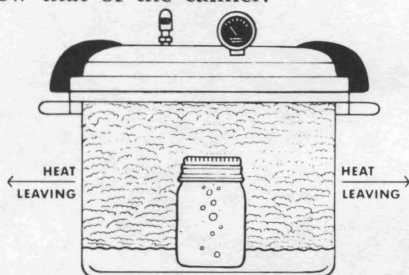


- If the vent is opened before the pressure reaches zero or too soon after pressure falls to zero, there is danger of jars exploding. This sudden release of outside pressure permits steam to form explosively in the jar and the liquid boils out.

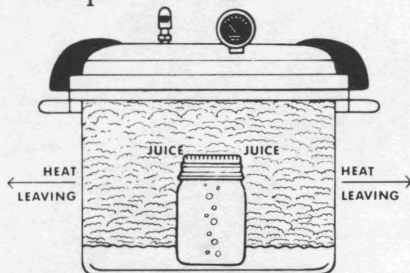

- When the canner is removed from heat and the petcock is left closed, cooling continues slowly. The gauge needle returns to zero. The vent is opened slowly. Air enters from


the outside. Too long a delay in opening the vent causes increasing vacuum. This makes the canner lid difficult to remove; jars may spurt liquid; and the gauge may be damaged.



- After jars are removed from the canner, the contents may continue to boil as the jar pressure is reduced by condensation of steam. Continued boiling is a good indication that jars are tightly sealed.



- The same principles apply to canners with weighted selective pressure controls and vent tube. However, the control which is made for 5, 10 and 15 pounds pressure is set on the tube that also serves as the vent. The periodic jiggle of the control indicates that the air is exhausted from the canner and that it has reached the desired pressure.



References

- Pressure Cooker – The Inside Story*, by Janet B. McCoy and Byron B. Robb.
Instructions for Using Pressure Canner, Mirro Aluminum Company, Manitowoc, Wisconsin.

Acknowledgment

Appreciation is extended to Sally Springer, Marilyn Haggard and Mary K. Sweeten, Extension foods and nutrition specialists, The Texas A&M University System, for their help in preparing this manuscript.

Educational programs conducted by the Texas Agricultural Extension Service serve people of all ages regardless of socio-economic levels, race, color, sex, religion or national origin.

Cooperative Extension Work in Agriculture and Home Economics, The Texas A&M University System and the United States Department of Agriculture cooperating. Distributed in furtherance of the Acts of Congress of May 8, 1914, as amended, and June 30, 1914.